

THEY MAY
FORGET
WHAT YOU SAID
BUT
THEY WILL
NEVER FORGET
HOW YOU MADE
THEM FEEL

WKLLED

VOL.6

LED LIGHTING
MAKES US
MORE
NATURAL IN LIFE

W WKLIGHTING



W WKLIGHTING

WE BRING VALUE TO LED LIGHTING



LED RECESSED DOWN LIGHT FIXTURE

01-18



LED CABINET & LINEAR LIGHT

19-27



LED OUTDOOR LIGHT FIXTURE

28-35



LED TRACK LIGHT & CEILING LAMP

36-37



LED SHOWCASE LAMP

38-40



LED INDOOR & OUTDOOR RECESSED WALL LIGHT

41-47



LED READING LAMP

48-52



LED LAMP & DRIVER

53-56

IT IS UP TO US TO WRITE OUR OWN FUTURE

Disclosure:

Product descriptions, specifications and images in this catalogue is based on the information disclosed at time of print. Hereafter, we are not responsible for any information that may have changed. Information may be changed from time to time. We encourage you to consult our associates for the most up-to-date information.

This catalogue contains references from suppliers that have been properly quoted. The catalogue should be used as a guide to the nature of products that are offered by WK Lighting Ltd.

WKLED



LED Recessed Down Light Fixture




	Model No. WK-FORTIMO-D4118 Twistable	Size 	Light Source Philips Fortimo Twistable 1100 lm. 18W / 840 (4000K) Twistable 1100 lm. 20W / 830 (3000K) With Integral LED Driver	Material Trim: Die Cast Aluminum Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
	Technical Data IP44 / Class III / CE /		<p>Fortimo Twistable 1100lm</p>	
	Colour <input type="checkbox"/> White			





	Model No. WK-LEDISK-D4118	Size 	Light Source Light Source: Ledisk 800 lm (2700K) Light Source: Ledisk 800 lm (5000K) With Integral LED Driver	Material Trim: Die Cast Aluminum Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
	Technical Data IP44 / Class III / CE /		<p>PHILIPS Ledisk 800 lm.</p>	
	Colour <input type="checkbox"/> White			






	Model No. WK-FORTIMO-D366 Twistable	Size 	Light Source Philips Fortimo Twistable 1100 lm. 18W / 840 (4000K) Twistable 1100 lm. 20W / 830 (3000K) With Integral LED Driver	Material Trim: Die Cast Aluminum Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
	Technical Data IP44 / Class III / CE /		<p>Fortimo Twistable 1100lm</p>	
	Colour <input type="checkbox"/> White			






	Model No. WK-FORTIMO-D366 SLM	Size 	Light Source 800lm 11W / 830(3000K) 800lm 10W / 840(4000K) 1100lm 17W / 830(3000K) 1100lm 15W / 840(4000K) With Remote SLM Xitanium Driver For TD: Touch and DALI dimming TE: Trailing edge dimming I: Independent	Material Trim: Die Cast Aluminum Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
	Technical Data IP44 / Class III / CE /		<p>Fortimo LED SLM 2000-3000lm</p>	
	Colour <input type="checkbox"/> White			

	Model No. WK-LEDISK-D366	Size 	Light Source Light Source: Ledisk 800 lm (2700K) Light Source: Ledisk 800 lm (5000K) With Integral LED Driver	Material Trim: Die Cast Aluminum Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
	Technical Data IP44 / Class III / CE /		<p>PHILIPS Ledisk 800 lm.</p>	
	Colour <input type="checkbox"/> White			








Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H6 Twistable		1100lm 20W / 830(3000K) 1100lm 18W / 840(4000K) 2000lm 32W / 830(3000K) 2200lm 32W / 840(4000K) With Integral LED Driver	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE / 			
Colour			
<input type="checkbox"/> White			
	H. 190 for Twistable 2000 lm.	Fortimo Twistable 1100lm	

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H6 DLM-i		1100lm 15W / 830(3000K) 1100lm 14W / 835(3500K) 1100lm 13W / 840(4000K) 2000lm 30W / 830(3000K) 2000lm 29W / 835(3500K) 2000lm 28W / 840(4000K) With Integral LED Driver	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE / 			
Colour			
<input type="checkbox"/> White			
	H. 195 for LED DLM 2000 lm.		

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H6 DLM / TDLM		2000lm 23W / 830(3000K) 2000lm 21W / 840(4000K) 3000lm 41W / 830(3000K) 3000lm 37W / 840(4000K) With Remote LED DLM Driver or With Remote DLM TD Dimmable Driver For DALI System.	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE / 			
Colour			
<input type="checkbox"/> White		 	
	H. 210 for Level LED DLM 3000 lm.	Fortimo LED DLM 1100-2000lm DLM Driver 1100-3000lm	

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H6 SLM		2000lm 25W / 830(3000K) 2000lm 23W / 840(4000K) 3000lm 41W / 830(3000K) 3000lm 37W / 840(4000K) With Remote SLM Xitanium Driver For TD: Touch and DALI dimming TE: Trailing edge dimming I: Independent	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE / 			
Colour			
<input type="checkbox"/> White			
	H. 210 for Level LED DLM 3000 lm.	Fortimo LED SLM 2000-3000lm	

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H6 Lexel		3x1100lm 44W / RGB 3000lm 44W / 2700K~6500K With Remote Lexel LED DLM 3000lm. With To Be Touched Color DMX Control.	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE / 			
Colour			
<input type="checkbox"/> White		 	
	H. 210 for Level LED DLM 3000 lm.	Lexel LED DLM RGB Lexel LED Driver 1100 DAL/DMX	

LED Recessed Down Light Fixture



Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H8 Twistable		1100lm 20W / 830(3000K) 1100lm 18W / 840(4000K) 2000lm 32W / 830(3000K) 2200lm 32W / 840(4000K)	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour			
<input type="checkbox"/> White			

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H8 DLM-i		2000lm 30W / 830(3000K) 2000lm 29W / 835(3500K) 2000lm 28W / 840(4000K) 3000lm 43W / 830(3000K) 3000lm 42W / 835(3500K) 3000lm 41W / 840(4000K) With Integral LED Driver	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour			
<input type="checkbox"/> White			

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H8 DLM / TDLM		2000lm 24W / 830(3000K) 2000lm 22W / 840(4000K) 3000lm 44W / 830(3000K) 3000lm 41W / 840(4000K) With Remote LED DLM Driver or With Remote DLM TD Dimmable Driver For DALI System.	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour			
<input type="checkbox"/> White		 Fortimo LED DLM 1100-2000lm	 DALI Driver 1100-3000lm

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H8 SLM		2000lm 32W / 830(3000K) 2000lm 29W / 840(4000K) 3000lm 43W / 830(3000K) 3000lm 38W / 840(4000K) With Remote SLM Xitanium Driver For TD: Touch and DALI dimming TE: Trailing edge dimming I: Independent	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour			
<input type="checkbox"/> White		 Fortimo LED SLM 2000-3000lm	

Model No.	Size	Light Source	Material
WK-Fortimo-Chester-H8 Lexel		3x1100lm 44W / RGB 3000lm 44W / 2700K-6500K With Remote Lexel LED DLM 3000lm. With To Be Touched Color DMX Control.	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour			
<input type="checkbox"/> White		 Lexel LED DLM RGB	 Lexel LED Driver 1100 DAL/DMX

The Philips Fortimo LED Line System is the replacement for linear fluorescent lamps in general lighting. The system features a high level of energy efficiency, which surpasses T5 systems. At the lowest possible cost (from minimum 121lm/W for a LED Line compared to a maximum possible output of 104 lm/W for a 28W TL5 HE lamp). It offers high-quality white light with excellent color rendering and color consistency. As part of the Fortimo future-proof promise, it comes with a 5-year Philips limited warranty.

Fortimo LED Line 1ft 650lm 840 3R Lv1

Fortimo: our concept name for efficient, clear and reliable lighting

LED: the light source used

Line: linear module

1ft: length of LED Line

650lm: 650 lumen output

840: 8 denotes a color rendering index of 80 (CRI divided by 10) 40 stands for a CCT of 4000 K (CCT divided by 100)

3R: indicates the number of LED rows on a LED Line, in this case 3

LV: Low Voltage::requires an UL class 2 / IEC compliant SELV driver

1: Generation 1

The Fortimo LED Line systems consist of the following products:

NEW!




Fortimo LED Line 3R LV1

	Asia Pacific region	Europe Middle East Africa	North America
Fortimo LED Line 1ft 650lm 830 3R Lv1	•	•	•
Fortimo LED Line 1ft 650lm 835 3R Lv1			•
Fortimo LED Line 1ft 650lm 840 3R Lv1	•	•	•
Fortimo LED Line 1ft 650lm 850 3R Lv1	•		•



Fortimo LED Line 1R LV1

	Asia Pacific region	Europe Middle East Africa	North America
Fortimo LED Line 1ft 1100lm 830 1R Lv1	•	•	•
Fortimo LED Line 1ft 1100lm 835 1R Lv1			•
Fortimo LED Line 1ft 1100lm 840 1R Lv1	•	•	•
Fortimo LED Line 1ft 1100lm 850 1R Lv1	•		•

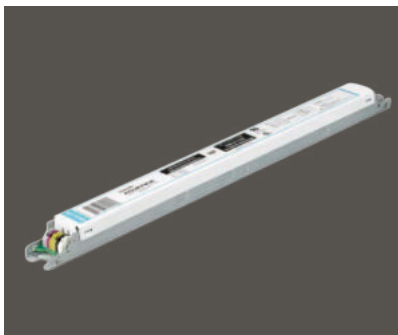

Applications and luminaire classification


The Fortimo LED Line System consists of a range of linear LED Lines, Xitanium drivers and a variety of cables. The LED Lines are mainly differentiated by the number of rows of LEDs on one module. The LED Line with three rows of LEDs is referred to as 3R. One row of LEDs as 1R. The range features a variety of different lumen packages and color temperatures.




LED Recessed Down Light Fixture




Model No.	Size	Light Source	Material
WK-PrevaLED-Chester-H6		2100lm 28W / 930(3000K) 2100lm 28W / 840(4000K) 3000lm 43W / 930(3000K) 3000lm 43W / 840(4000K) With Remote OPTRONIC control gear OTP 45 for Preva Led Core	Trim: Poly Carbonate Diffuser: Matt Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour <input type="checkbox"/> White			





Model No.	Size	Light Source	Material
WK-PrevaLED-Chester-H6 DALI		2100lm 28W / 930(3000K) 2100lm 28W / 840(4000K) 3000lm 43W / 930(3000K) 3000lm 43W / 840(4000K) With Remote OPTRONIC control gear DALI 35	Trim: Poly Carbonate Diffuser: Matt Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour <input type="checkbox"/> White			




Model No.	Size	Light Source	Material
WK-PrevaLED-Chester-H8		2100lm 28W / 930(3000K) 2100lm 28W / 840(4000K) 3000lm 43W / 930(3000K) 3000lm 43W / 840(4000K) With Remote OPTRONIC control gear OTP 45 for Preva Led Core	Trim: Poly Carbonate Diffuser: Matt Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour <input type="checkbox"/> White			



Model No.	Size	Light Source	Material
WK-PrevaLED-Chester-H8 DALI		2100lm 28W / 930(3000K) 2100lm 28W / 840(4000K) 3000lm 43W / 930(3000K) 3000lm 43W / 840(4000K) With Remote OPTRONIC control gear DALI 35	Trim: Poly Carbonate Diffuser: Matt Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.
Technical Data			
IP44 / Class III / CE /			
Colour <input type="checkbox"/> White			

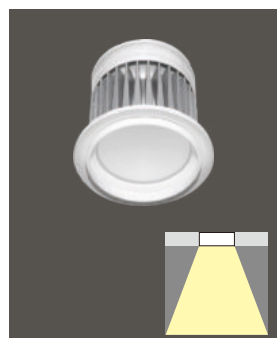

Model No.	Size	Light Source	Material
WK-71-83-LP20-OSRAM		20W / 830 LED Down Light 20W / 840 LED Down Light (Osram-High Power LED Inside)	Trim: Die cast aluminum Diffuser: Matt Tempered Glass Housing & Heat Sink: Die cast aluminum.
Technical Data			
IP 21 / Class I / Class III / CE /			
Colour <input type="checkbox"/> White			

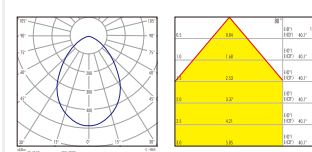



LED Recessed Down Light Fixture

	Model No.	Size	Light Source	Material
	WK-PrevaLED-D366 Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> White	 PrevaLED 800-1500lm	800lm 11W / 930(3000K) 800lm 11W / 840(4000K) 1500lm 21W / 930(3000K) 1500lm 21W / 840(4000K) With Remote OPTRONIC control gear OTp 45 for Preva Led Core	Trim: Die cast aluminum. Diffuser: Matt Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.

	Model No.	Size	Light Source	Material
	WK-PrevaLED-D366 DALI Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> White	 PrevaLED 800-1500lm	800lm 11W / 930(3000K) 800lm 11W / 840(4000K) 1500lm 21W / 930(3000K) 1500lm 21W / 840(4000K) With Remote OPTRONIC OTP DALI 35	Trim: Die cast aluminum. Diffuser: Matt Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB.

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-D4118-18 Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> White	 140	8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-D366-18 Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> White	 145	8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-84-262-H6 Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> White	 200	18W CREE LED Cool White (6000K) 18W CREE LED Natural White (4000K) 18W CREE LED Warm White (3000K) 18W CREE LED Warm White (2700K) With Remote Led driver	Trim: Poly Carbonate Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Steel LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	

LED Recessed Down Light Fixture







	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-828		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) With Remote Led driver	Housing, Trim: 304 Stainless Steel, (316 Stainless Steel on request) Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB.	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<ul style="list-style-type: none"> <input type="checkbox"/> Brushed Stainless Steel (304) <input type="checkbox"/> Brushed Stainless Steel (316) (on request) 				
		Ultra thin!! 8mm Only			





	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-8088		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black 				





	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-8086		7W SHARP LED Natural White (4000K) 7W SHARP LED Warm White (3000K) 7W SHARP LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black 				





	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-8075		3W / 9W CREE LED Cool White (6000K) 3W / 9W CREE LED Natural White (4000K) 3W / 9W CREE LED Warm White (3000K) 3W / 9W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black 				





	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-8077		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Glass: Tempered clear glass.	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black 				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-5018 Technical Data IP20 / Class III / CE / ▽ Colour <input checked="" type="checkbox"/> Black <input type="checkbox"/> White		5W / 10W CREE LED Cool White (6000K) 5W / 10W CREE LED Natural White (4000K) 5W / 10W CREE LED Warm White (3000K) 5W / 10W CREE LED Warm White (2700K) 7W SHARP LED Natural White (4000K) 7W SHARP LED Warm White (3000K) 7W SHARP LED Warm White (2700K) With Remote Led driver	Trim & Ring: Cast Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
Option  WK-71-83-5018-IP54 Glass: Tempered clear glass					

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-5019 Technical Data IP20 / Class III / CE / ▽ Colour <input checked="" type="checkbox"/> Black <input type="checkbox"/> White		5W / 10W CREE LED Cool White (6000K) 5W / 10W CREE LED Natural White (4000K) 5W / 10W CREE LED Warm White (3000K) 5W / 10W CREE LED Warm White (2700K) 7W SHARP LED Natural White (4000K) 7W SHARP LED Warm White (3000K) 7W SHARP LED Warm White (2700K) With Remote Led driver	Trim & Ring: Cast Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
Option  WK-71-83-5019-IP54 Glass: Tempered clear glass					

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-61-AL19 Technical Data IP20 / Class III / CE / ▽ Colour <input checked="" type="checkbox"/> Black <input type="checkbox"/> White		5W / 10W CREE LED Cool White (6000K) 5W / 10W CREE LED Natural White (4000K) 5W / 10W CREE LED Warm White (3000K) 5W / 10W CREE LED Warm White (2700K) 7W SHARP LED Natural White (4000K) 7W SHARP LED Warm White (3000K) 7W SHARP LED Warm White (2700K) With Remote Led driver	Trim & Ring: Aluminum. Housing: Metal. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
Option 					





	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-61-AL20 Technical Data IP20 / Class III / CE / ▽ Colour <input type="checkbox"/> White		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) With Remote Led driver	Trim & Ring: Aluminum. Housing: Metal. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
Option 					





	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-61-AL21 Technical Data IP20 / Class III / CE / ▽ Colour <input type="checkbox"/> White		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) With Remote Led driver	Trim & Ring: Aluminum. Housing: Metal. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
Option 					











LED Recessed Down Light Fixture



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-818		3W / 9W CREE LED Cool White (6000K) 3W / 9W CREE LED Natural White (4000K) 3W / 9W CREE LED Warm White (3000K) 3W / 9W CREE LED Warm White (2700K) With Remote Led driver	Trim & Housing: Metal. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Reflector: aluminum, bright anodised.	
	Technical Data				
	IP44 / Class III / CE / 				
Colour	<input type="checkbox"/> White				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-878D		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Trim & Housing: Metal. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Reflector: aluminum, bright anodised. Glass: Tempered clear glass.	
	Technical Data				
	IP44 / Class III / CE / 				
Colour	<input type="checkbox"/> White				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-818PC		3W / 9W CREE LED Cool White (6000K) 3W / 9W CREE LED Natural White (4000K) 3W / 9W CREE LED Warm White (3000K) 3W / 9W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Trim: Cast Aluminum. Glass: Tempered glass.	
	Technical Data				
	IP44 / Class III / CE / 				
Colour	<input type="checkbox"/> Black <input type="checkbox"/> White				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-878PC		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Trim: Cast Aluminum. Glass: Tempered glass.	
	Technical Data				
	IP44 / Class III / CE / 				
Colour	<input type="checkbox"/> Black <input type="checkbox"/> White				









LED Recessed Down Light Fixture

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-819D		3W / 9W CREE LED Cool White (6000K) 3W / 9W CREE LED Natural White (4000K) 3W / 9W CREE LED Warm White (3000K) 3W / 9W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Trim: Cast Aluminum. Glass: Tempered clear glass.	
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White	0°-30° tilt			

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-879D		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim : Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Trim: Cast Aluminum. Diffuser: Tempered clear glass.	
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White	0°-30° tilt			

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-819		3W / 9W CREE LED Cool White (6000K) 3W / 9W CREE LED Natural White (4000K) 3W / 9W CREE LED Warm White (3000K) 3W / 9W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White	0°-30° tilt			

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-824		3W / 6W CREE LED Cool White (6000K) 3W / 6W CREE LED Natural White (4000K) 3W / 6W CREE LED Warm White (3000K) 3W / 6W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White	0°-30° tilt			

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-824-H38		3W / 6W CREE LED Cool White (6000K) 3W / 6W CREE LED Natural White (4000K) 3W / 6W CREE LED Warm White (3000K) 3W / 6W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White	0°-30° tilt			

LED Recessed Down Light Fixture









	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-831		6W CREE LED Cool White (6000K) 6W CREE LED Natural White (4000K) 6W CREE LED Warm White (3000K) 6W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
<input type="checkbox"/> Aluminum <input type="checkbox"/> White					




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-831-H		18W CREE LED Cool White (6000K) 18W CREE LED Natural White (4000K) 18W CREE LED Warm White (3000K) 18W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
<input type="checkbox"/> Aluminum <input type="checkbox"/> White					




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-831D		6W CREE LED Cool White (6000K) 6W CREE LED Natural White (4000K) 6W CREE LED Warm White (3000K) 6W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
<input type="checkbox"/> Aluminum <input type="checkbox"/> White					




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-831D-H		18W CREE LED Cool White (6000K) 18W CREE LED Natural White (4000K) 18W CREE LED Warm White (3000K) 18W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
<input type="checkbox"/> Aluminum <input type="checkbox"/> White					

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-850		5W / 10W CREE LED Cool White (6000K) 5W / 10W CREE LED Natural White (4000K) 5W / 10W CREE LED Warm White (3000K) 5W / 10W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-870		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP20 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-872		8W / 18W CREE LED Cool White (5000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-83-843		23W SHARP LED Cool White (5000K) 23W SHARP LED Natural White (4000K) 23W SHARP LED Warm White (3000K) With Remote Led driver	Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-81-240S		7W SHARP LED Natural White (4000K) 7W SHARP LED Warm White (3000K) 7W SHARP LED Warm White (2700K)	Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

LED Recessed Down Light Fixture



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-81-1070-1H		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Remote Led driver	Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data IP20 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

















	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-81-1070-2H		8W / 18Wx2 CREE LED Cool White (6000K) 8W / 18Wx2 CREE LED Natural White (4000K) 8W / 18Wx2 CREE LED Warm White (3000K) 8W / 18Wx2 CREE LED Warm White (2700K) With Remote Led driver	Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data IP20 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-81-1070-3H		8W / 18Wx3 CREE LED Cool White (6000K) 8W / 18Wx3 CREE LED Natural White (4000K) 8W / 18Wx3 CREE LED Warm White (3000K) 8W / 18Wx3 CREE LED Warm White (2700K) With Remote Led driver	Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data IP20 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-81-1070-4H		8W / 18Wx4 CREE LED Cool White (6000K) 8W / 18Wx4 CREE LED Natural White (4000K) 8W / 18Wx4 CREE LED Warm White (3000K) 8W / 18Wx4 CREE LED Warm White (2700K) With Remote Led driver	Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data IP20 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				















LED Recessed Down Light Fixture







	<p>Model No. WK-71-83-826</p> <p>Technical Data IP20 / Class III / CE / ▽</p> <p>Colour</p> <ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White 	<p>Size</p>  <p>0°-30° tilt</p>	<p>Light Source</p> <p>3W / 9W CREE LED Cool White (6000K) 3W / 9W CREE LED Natural White (4000K) 3W / 9W CREE LED Warm White (3000K) 3W / 9W CREE LED Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Trim & Ring: Aluminum. Housing: Metal. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA</p>	<p>Beam Angle</p> 
	<p>Model No. WK-71-81-817-1H</p> <p>Technical Data IP20 / Class III / CE / ▽</p> <p>Colour</p> <ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White 	<p>Size</p>  <p>0°-20° tilt</p>	<p>Light Source</p> <p>1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA</p>	<p>Beam Angle</p> 
	<p>Model No. WK-71-81-817-2H</p> <p>Technical Data IP20 / Class III / CE / ▽</p> <p>Colour</p> <ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White 	<p>Size</p>  <p>0°-20° tilt</p>	<p>Light Source</p> <p>2W / 6W CREE LED Cool White (6000K) 2W / 6W CREE LED Natural White (4000K) 2W / 6W CREE LED Warm White (3000K) 2W / 6W CREE LED Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA</p>	<p>Beam Angle</p> 
	<p>Model No. WK-71-81-817-3H</p> <p>Technical Data IP20 / Class III / CE / ▽</p> <p>Colour</p> <ul style="list-style-type: none"> <input type="checkbox"/> Aluminum <input type="checkbox"/> Black <input type="checkbox"/> White 	<p>Size</p>  <p>0°-20° tilt</p>	<p>Light Source</p> <p>3W / 9W CREE LED Cool White (6000K) 3W / 9W CREE LED Natural White (4000K) 3W / 9W CREE LED Warm White (3000K) 3W / 9W CREE LED Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Housing: Steel. Trim & Ring: Aluminum. Heat Sink: Cast aluminum. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA</p>	<p>Beam Angle</p> 

LED Recessed Down Light Fixture








 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-12-D-4		1080lm 11W Cool White(6000K) 1080lm 11W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		 (OSRAM SMD LED on request)		






 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-12-D-6		2160lm 23W Cool White(6000K) 2160lm 23W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		 (OSRAM SMD LED on request)		






 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-12-D-8		3060lm 31W Cool White(6000K) 3060lm 31W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		 (OSRAM SMD LED on request)		













LED Recessed Down Light Fixture

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-4118-D4	102x90	720lm 8W Cool White(6000K) 720lm 8W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	 120°
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	 0°-30° tilt	 (OSRAM SMD LED on request)		

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-4118-D5	120x135	1080lm 11W Cool White(6000K) 1080lm 11W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	 120°
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	 0°-20° tilt	 (OSRAM SMD LED on request)		

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-4118-D6	145x145	2160lm 22W Cool White(6000K) 2160lm 22W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	 120°
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	 0°-20° tilt	 (OSRAM SMD LED on request)		

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-4119-D6	145x145	2160lm 22W Cool White(6000K) 2160lm 22W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	 120°
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	 0°-20° tilt	 (OSRAM SMD LED on request)		

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-4118-D8	210x210	3060lm 31W Cool White(6000K) 3060lm 31W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Special tempered refraction glass Led: Ultra Bright 5630 Samsung (Single chip)	 120°
	Technical Data IP44 / Class III / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	 0°-20° tilt	 (OSRAM SMD LED on request)		

LED Recessed Down Light Fixture



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-11-D4		720lm 8W Cool White(6000K) 720lm 8W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Matt PMMA Led: Ultra Bright 5630 Samsung (Single chip)	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	0°-30° tilt	(OSRAM SMD LED on request)		

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-11-D5		1080lm 11W Cool White(6000K) 1080lm 11W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Matt PMMA Led: Ultra Bright 5630 Samsung (Single chip)	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	0°-20° tilt	(OSRAM SMD LED on request)		

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-11-D6		1800lm 18W Cool White(6000K) 1800lm 18W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Matt PMMA Led: Ultra Bright 5630 Samsung (Single chip)	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	0°-20° tilt	(OSRAM SMD LED on request)		

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-10-11-D8		2160lm 22W Cool White(6000K) 2160lm 22W Warm White(3000K) With Remote Led driver	Trim & Housing: Die cast Aluminum. Heat Sink: Die Cast aluminum. Diffuser: Matt PMMA Led: Ultra Bright 5630 Samsung (Single chip)	
	Technical Data				
	IP44 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White	0°-20° tilt	(OSRAM SMD LED on request)		



Ultra slim, no flicker, antiglare, energy saving, on UV radiation, high energy efficiency, DALI dimming.

Operating temperature -20°-+60°C

Light Source	Ultra Bright 5630 Samsung(Single chip)
Voltage	85-265V
CCT	3000K 4000K 5000K
Beam Angle	120°
CRI	>80
Dimmable	(1-10V,DALI) on request
Frame	aluminum
Diffuser	polycarbonate



Art. no.	WK-LP0606CW
Dimension	596x596x12mm
Power	47W
Lumen	4800Lm



Art. no.	WK-LP0312CW
Dimension	596x1196x12mm
Power	54W
Lumen	4800Lm



Specification

Model No	Size(mm)	Power	CCT	Output lumen
WK-LP0606CW	596X596X12	47W	5000K	3000 lumen
WK-LP0312CW	296X1196X12	54W	5000K	3000 lumen

WK-LP0606CW(3000 lumen)

H[m]	D[m]	MaxLux	MedLux	Alpha=55.8°+55.8°	G=0.0 Max not at G	
0.50	1.47	4587	1226			
1.00	2.94	1147	307			
1.50	4.41	510	136			
2.00	5.88	287	77			
2.50	7.36	183	49			

WK-LP0312CW(3000 lumen)

H[m]	D[m]	MaxLux	MedLux	Alpha=49.7°+49.7°	G=0.0 Max not at G	
0.50	2.36	1144	339			
1.00	4.71	286	85			
1.50	7.07	127	38			
2.00	9.43	71	21			
2.50	11.78	46	14			

LED Cabinet & Linear Light



WK-71-64-967-3528

LED Colour:



Warm White (2400K)




Warm White (2700K)



Warm White (3000K)



Natural White (4000K)

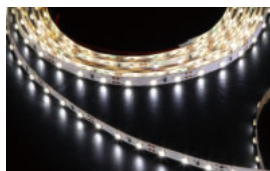

Cool White (6000K)




Cool White (6000K)

Options:



- 1) Aluminum Extrusion profile
- 2) Diffuser

Flex-Cove LED (IP 20 Version-3M Tape) Series

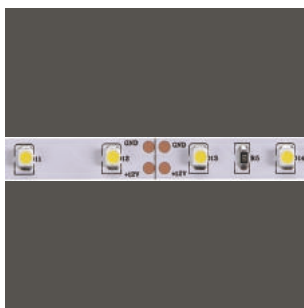

WK-71-64-967-3528-60-12VDC-IP20

Power: 12VDC 5W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 3 LED
Packing: 5Meter/Roll

WK-71-64-967-3528-60-24VDC-IP20

Power: 24VDC 5W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 6 LED
Packing: 5Meter/Roll

Description: Ultra slim waterproof flexible LED SMD light strip available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1.Backlighting for advertising signage, glass decoration.
2.Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.

Light Source: Ultra Bright 3528(single chip)


Material: Body made of flexible PCB.

IP Rating: IP20 without silicon tube.


Dimension: Width: 13.5mm Height: 4.5mm Length: 5000mm (Custom made size are available).

Accessories: Mounting Clip & End Cap.

Options: 1)Aluminum Extrusion profile
2)Diffuser

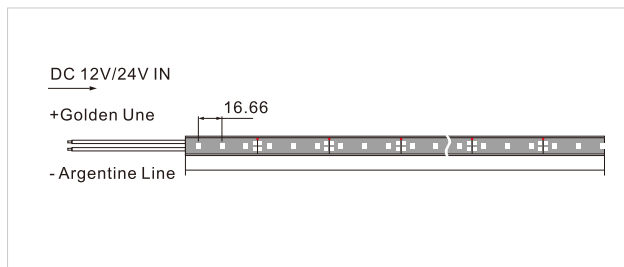

Flex-Cove LED(IP 67 Version)Series

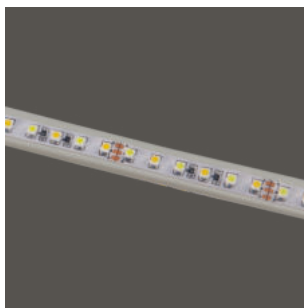

WK-71-64-967-3528-60-12VDC-IP67

Power: 12VDC 5W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 3 LED
Packing: 5Meter/Roll

WK-71-64-967-3528-60-24VDC-IP67

Power: 24VDC 5W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 6 LED
Packing: 5Meter/Roll

Description: Ultra slim waterproof flexible LED SMD light strip available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1.Backlighting for advertising signage, glass decoration.
2.Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.


Light Source: Ultra Bright 3528 (single chip)


Material: Body made of flexible PCB & packed with waterproof IP67 silicon tube.

IP Rating: IP67 silicon tube.

Dimension: Width: 13.5mm Height: 4.5mm Length: 5000mm (Custom made size are available).
Cut line in every 3 LED.

Accessories: Mounting Clip & End Cap.

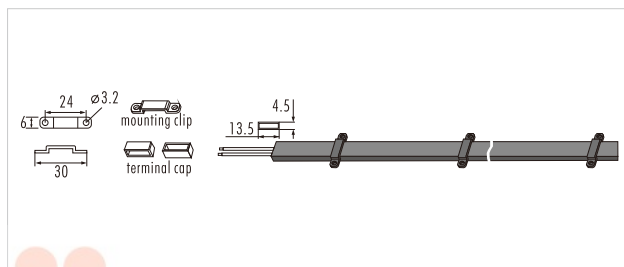

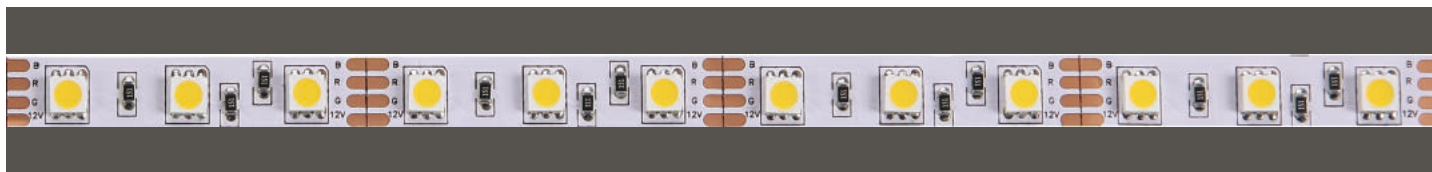

WK-71-64-967-5050

LED Colour:




Warm White (2400K)



Warm White (2700K)



Warm White (3000K)

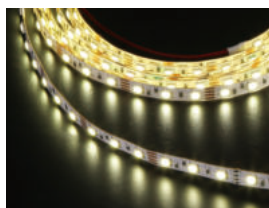

Natural White (4000K)



Cool White (6000K)

Options:



- 1) Aluminum Extrusion profile
- 2) Diffuser

Flex-Cove LED (IP 20 Version-3M Tape)Series



WK-71-64-967-5050-60-12VDC-IP20

Power: 12VDC 15W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 3 LED
Packing: 5Meter/Roll

WK-71-64-967-5050-60-24VDC-IP20

Power: 24VDC 15W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 6 LED
Packing: 5Meter/Roll

Description: Ultra slim LED SMD light bar available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1) Backlighting for advertising signage, glass decoration.
2) Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.


Light Source: 5050 (Triple chip) SMD LED.

Material: Body made of Aluminum Extrusion.


IP Rating: IP20 without diffuser/ IP44 with Diffuser

Dimension: A)W:21 H:8mm without diffuser B)W:21 H:18mm diffuser C) W:21 H:25mm diffuser 500/ 1000mm (Custom made size are available in 100mm)

Accessories: Mounting Clip Male & Female Plug

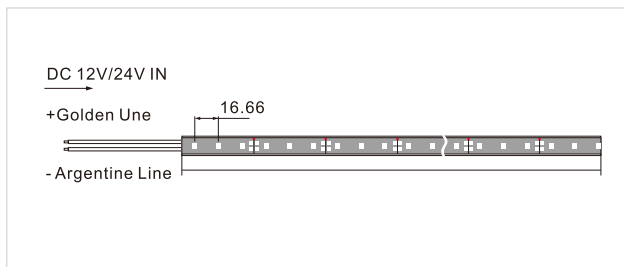

Flex-Cove LED(IP 67 Version)Series



WK-71-64-967-5050-60-12VDC-IP67

Power: 12VDC 15W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 3 LED
Packing: 5Meter/Roll

WK-71-64-967-5050-60-24VDC-IP67

Power: 24VDC 15W/Meter
LED Qty.: 60pcs/Meter
Beam Angle: 120 Degree
Cut line in every 6 LED
Packing: 5Meter/Roll

Description: Ultra slim LED SMD light bar available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1) Backlighting for the advertising signage, glass decoration.
2) Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.


Light Source: 5050 (Triple chip) SMD LED.

Material: Body made of Aluminum Extrusion, Diffuser are available in Opal & Clear.

IP Rating: IP67 silicon tube.

Dimension: A)W:21 H:8mm without diffuser B)W:21 H:18mm diffuser C) W:21 H:25mm diffuser 500/1000mm (Custom made size are available in 100mm)

Accessories: Mounting Clip Male & Female Plug

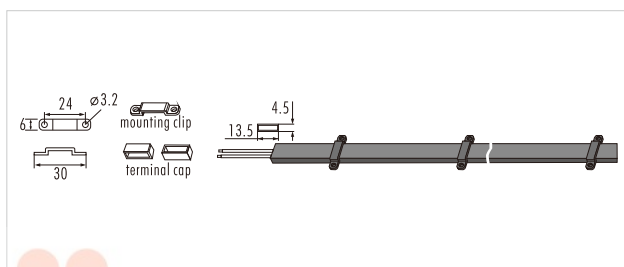

LED Cabinet & Linear Light



WK-71-64-968-3528

LED Colour:



Warm White (2400K)



Warm White (2700K)



Warm White (3000K)



Natural White (4000K)




Cool White (6000K)

Options:



- 1) Aluminum Extrusion profile
- 2) Diffuser

Flex-Cove LED (IP 20 Version-3M Tape)Series



WK-71-64-968-3528-60-12VDC-IP20

Power: 12VDC 5W/Meter
 LED Qty.: 60pcs/Meter
 Beam Angle: 120 Degree
 Cut line in every 3 LED
 Packing: 5Meter/Roll

WK-71-64-968-3528-60-24VDC-IP20

Power: 24VDC 5W/Meter
 LED Qty.: 60pcs/Meter
 Beam Angle: 120 Degree
 Cut line in every 6 LED
 Packing: 5Meter/Roll

Description: Ultra slim waterproof flexible LED SMD light strip available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1.Backlighting for advertising signage, glass decoration.
 2.Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.

Light Source: Ultra Bright 3528(single chip)


Material: Body made of flexible PCB.


IP Rating: IP20 without silicon tube.

Dimension: Width: 13.5mm Height: 4.5mm Length: 5000mm (Custom made size are available).

Accessories: Mounting Clip & End Cap.

Options: 1)Aluminum Extrusion profile
 2)Diffuser

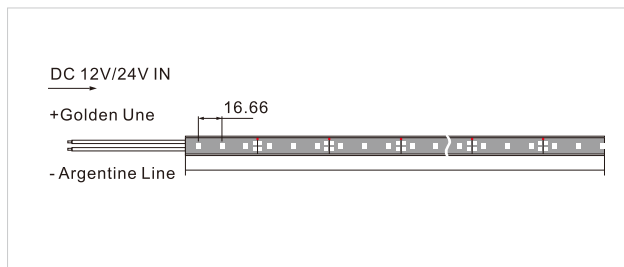

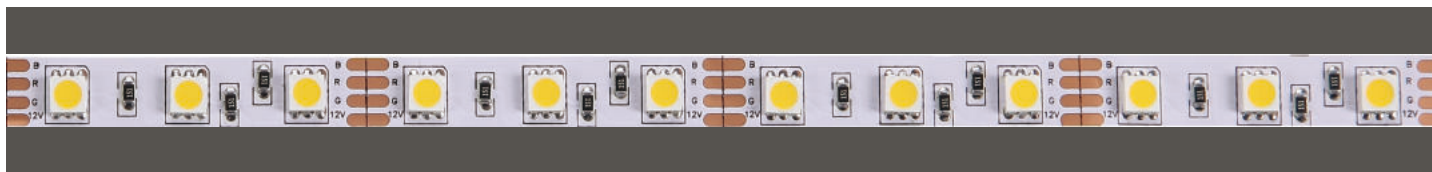

WK-71-64-968-5050

LED Colour:



Warm White (2400K)



Warm White (2700K)



Warm White (3000K)



Natural White (4000K)



Cool White (6000K)

Options:



- 1) Aluminum Extrusion profile
- 2) Diffuser



WK-71-64-968-5050-60-12VDC-IP20

Power: 12VDC 15W/Meter

LED Qty.: 60pcs/Meter

Beam Angle: 120 Degree

Cut line in every 3 LED

Packing: 5Meter/Roll

WK-71-64-968-5050-60-24VDC-IP20

Power: 24VDC 15W/Meter

LED Qty.: 60pcs/Meter

Beam Angle: 120 Degree

Cut line in every 6 LED

Packing: 5Meter/Roll

Description: Ultra slim waterproof flexible LED SMD light strip available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1.Backlighting for advertising signage, glass decoration.
2.Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.

Light Source: Ultra Bright 5050 (single chip)


Material: Body made of flexible PCB.

IP Rating: IP20 without silicon tube.


Dimension: Width: 13.5mm Height: 4.5mm Length: 5050mm (Custom made size are available).

Accessories: Mounting Clip & End Cap.

Options: 1)Aluminum Extrusion profile
2)Diffuser

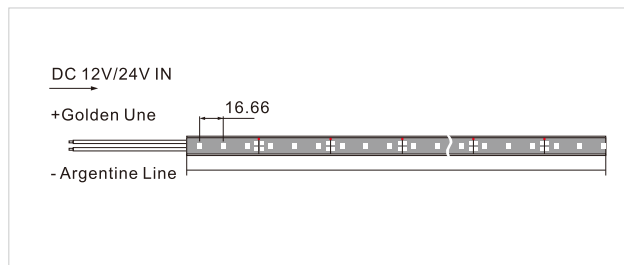

LED Cabinet & Linear Light

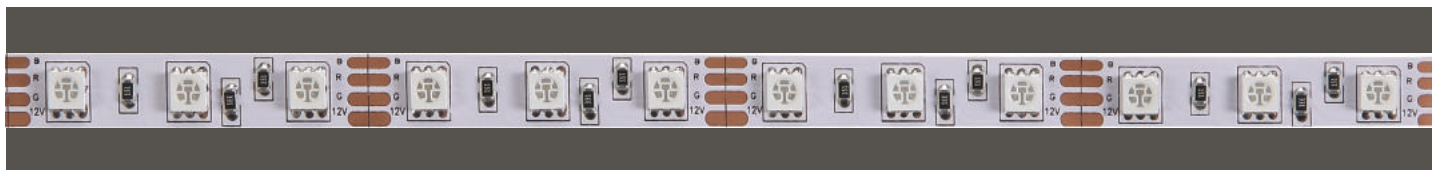


WK-71-64-967-5050-RGB

LED Colour:



Flex-Cove LED (IP 20 Version-3M Tape)Series

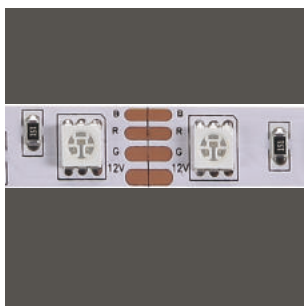

WK-71-64-967-5050-RGB-IP20
 Power: 12VDC / 24VDC 15W/Meter
 LED Qty.: 60pcs/Meter
 Beam Angle: 120 Degree
 Cut line in every 3 LED for 12V
 Cut line in every 6 LED for 24V
 Packing: 3Meter/Roll

Description: Ultra slim waterproof flexible LED SMD light strip available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1.Backlighting for advertising signage, glass decoration.
 2.Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.

Light Source: Ultra Bright 5050


Material: Body made of flexible PCB.

IP Rating: IP20 without silicon tube.


Dimension: Width: 13.5mm Height: 4.5mm Length: 5000mm (Custom made size are available).

Accessories: Mounting Clip & End Cap.

Options: 1)Aluminum Extrusion profile
 2)Diffuser

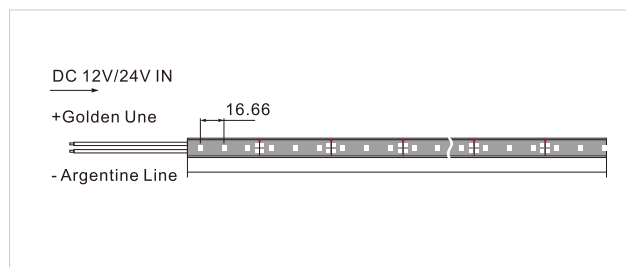

Flex-Cove LED(IP 67 Version)Series

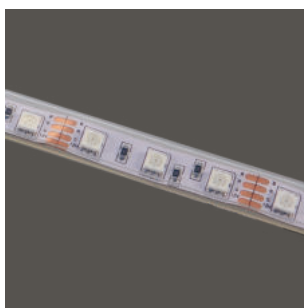

WK-71-64-967-5050-RGB-IP67
 Power: 12VDC 30W/Meter
 LED Qty.: 60pcs/Meter
 Beam Angle: 120 Degree
 Cut line in every 3 LED.

Description: Ultra slim waterproof flexible LED SMD light strip available in full range of single colours and RGB full colour. Optional aluminum profile & PMMA Diffuser are available. Ultra low power consumption suitable for hotel, office & commercial building.

Application: 1.Backlighting for advertising signage, glass decoration.
 2.Cove Lighting for the hotel lobby, guestroom, office, lift lobby & commercial building etc.


Light Source: Ultra Bright 5050

Material: Body made of flexible PCB & packed with waterproof IP67 silicon tube.

IP Rating: IP67 silicon tube.

Dimension: Width: 13.5mm Height: 4.5mm Length: 5000mm (Custom made size are available).
 Cut line in every 3 LED.

Accessories: Mounting Clip & End Cap.

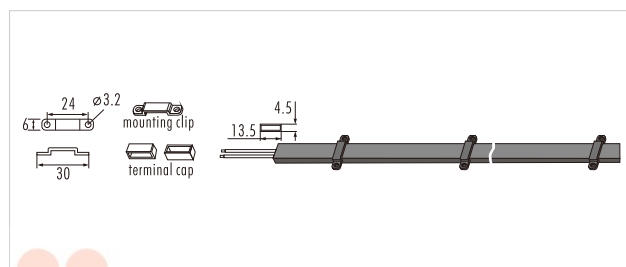


Options:




1)Aluminum Extrusion profile
 2)Diffuser




ALUMINIUM PROFILES + PLASTIC COVERS

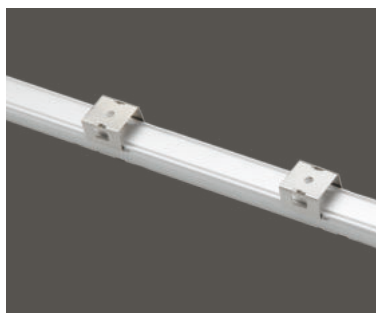


WK-71-64-96-AP

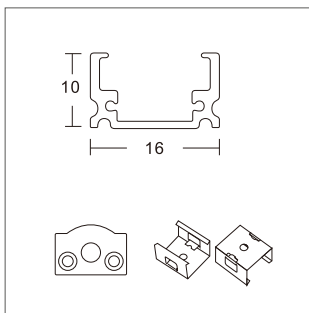


WK-71-64-96-PCR-Matt




WK-71-64-96-PC-F-Matt
WK-71-64-96-PC-F-Clear



WK-71-64-96-PCR-Clear




LED Linear Light Power Supply

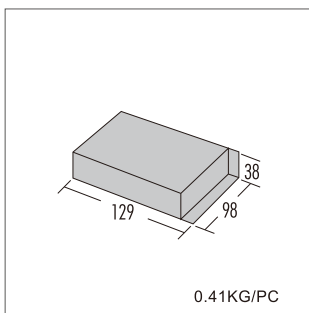

WK-76-NES-50-12

Output Voltage 12V (10.8~13.2Vdc)
Output Power 50.4W
Output Current 4.2A(0~4.2A)
Input Voltage 85V~264Vac
Input Frequency 50Hz / 60Hz

Temperature -20°C~+60°C
Humidity 20~90% RH
UL60950-1, CB(IEC60950-1), GB4943
EN55022(CISPR22) CLASS B, GB9254 CLASS B
EN61000-3-2, -3 EN61000-4-2,3,4,5,6,8,11,
ENV50204, EN55024, EN61000-6-1


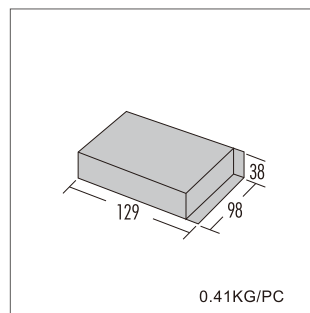


WK-76-NES-50-24

Output Voltage 24V (21.6~26.4Vdc)
Output Power 52.8W
Output Current 2.2A(0~2.2A)
Input Voltage 85V~264Vac
Input Frequency 50Hz / 60Hz

Temperature -20°C~+60°C
Humidity 20~90% RH
UL60950-1, CB(IEC60950-1), GB4943
EN55022(CISPR22) CLASS B, GB9254 CLASS B
EN61000-3-2, -3 EN61000-4-2,3,4,5,6,8,11,
ENV50204, EN55024, EN61000-6-1

LED Cabinet & Linear Light

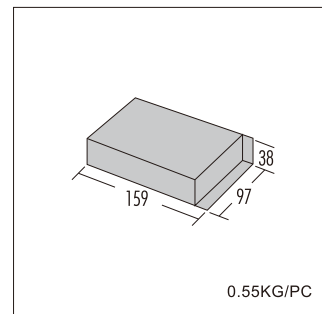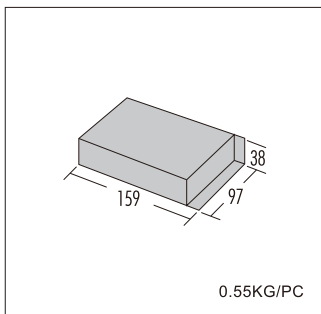

WK-76-NES-100-12



Output Voltage 12V (11.7~13.5V)
Output Power 102W
Output Current 8.5A(0~8.5A)
Input Voltage 85~132V or 176-264V
Input Frequency 50Hz / 60Hz

Temperature -20°C~+60°C
Humidity 20~90% RH
 UL60950-1, CB(IEC60950-1), GB4943
 EN55022(CISPR22) CLASS B, GB9254 CLASS B
 EN61000-3-2, -3, GB17625.1
 EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024,
 EN61000-6-1

WK-76-NES-100-24

Output Voltage 24V (21.6~26.4Vdc)
Output Power 108W
Output Current 4.5A(0~4.5A)
Input Voltage 85~132V or 176-264V
Input Frequency 50Hz / 60Hz

Temperature -20°C~+60°C
Humidity 20~90% RH
 UL60950-1, CB(IEC60950-1), GB4943
 EN55022(CISPR22) CLASS B, GB9254 CLASS B
 EN61000-3-2, -3 EN61000-4-2,3,4,5,6,8,11,
 ENV50204, EN55024, EN61000-6-1

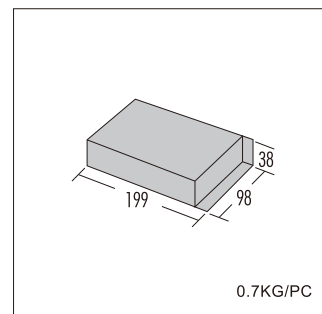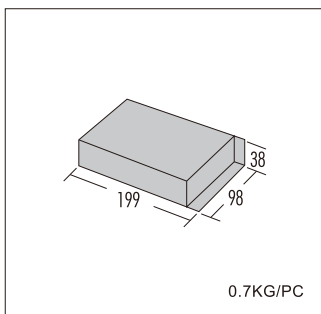

WK-76-NES-150-12



Output Voltage 12V (11.4~13.5Vdc)
Output Power 150W
Output Current 12.5A(0~12.5A)
Input Voltage 90~132V or 180~264V
Input Frequency 50Hz / 60Hz

Temperature -20°C~+60°C
Humidity 20~90% RH
 UL60950-1, CB(IEC60950-1), GB4943
 EN55022(CISPR22) CLASS B, GB9254 CLASS B
 EN61000-3-2, -3, GB17625.1
 EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024,
 EN61000-6-1

WK-76-NES-150-24

Output Voltage 24V (22.8~27.6Vdc)
Output Power 156W
Output Current 6.5A(0~6.5A)
Input Voltage 90~132V or 180~264V
Input Frequency 50Hz / 60Hz

Temperature -20°C~+60°C
Humidity 20~90% RH
 UL60950-1, CB(IEC60950-1), GB4943
 EN55022(CISPR22) CLASS B, GB9254 CLASS B
 EN61000-3-2, -3, GB17625.1
 EN61000-4-2,3,4,5,6,8,11, ENV50204, EN55024,
 EN61000-6-1

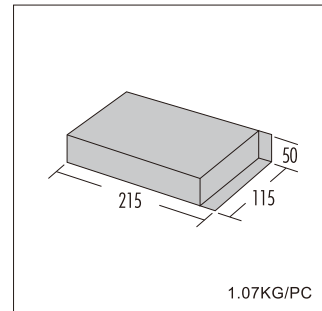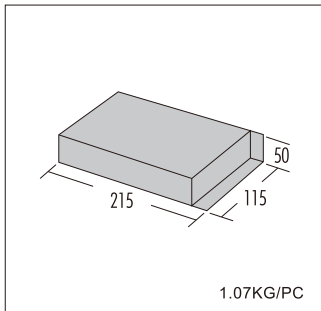

WK-76-NES-350-12

Output Voltage 12V (10~13.5Vdc)
Output Power 348W
Output Current 29A(0~29A)
Input Voltage 90~132A or 180~264V
Input Frequency 50Hz / 60Hz


Temperature -20°C~+60°C
Humidity 20~90% RH
 UL60950-1, EN55022(CISPR22) CLASS A,
 EN61000-4-2,3,4,5,6,8,11,
 ENV50204, EN55024.A

WK-76-NES-350-24


Output Voltage 24V (20~26.4Vdc)
Output Power 350.4W
Output Current 14.6A(0~14.6A)
Input Voltage 90~132A or 180~264V
Input Frequency 50Hz / 60Hz

Temperature -20°C~+60°C
Humidity 20~90% RH
 UL60950-1, EN55022(CISPR22) CLASS A,
 EN61000-4-2,3,4,5,6,8,11,
 ENV50204, EN55024.A

OPTION



WK-76-HEP 1-10v
 Remote HEP 1-10v dimming interface
 for led strip

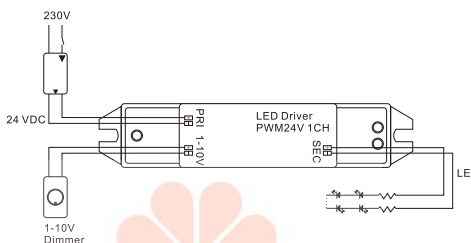




LED Cabinet & Linear Light




Model No.	Size	Light Source	Material	Beam Angle
WK-71-64-702-0-6 WK-71-64-702-0-12		6W CREE LED Cool White (6000K) 6W CREE LED Natural White (4000K) 6W CREE LED Warm White (3000K) 6W CREE LED Warm White (2700K) 12W CREE LED Cool White (6000K) 12W CREE LED Natural White (4000K) 12W CREE LED Warm White (3000K) 12W CREE LED Warm White (2700K) With Remote Led driver	Body: Aluminum Glass: Toughened Clear Glass.	
Technical Data		WK-71-64-702-0-6		
IP54 / Class III / CE / ▽	WK-71-64-702-0-12			
Colour				
Black				




Model No.	Size	Light Source	Material	Beam Angle
WK-71-64-702-1-6 WK-71-64-702-1-12		6W CREE LED Cool White (6000K) 6W CREE LED Natural White (4000K) 6W CREE LED Warm White (3000K) 6W CREE LED Warm White (2700K) 12W CREE LED Cool White (6000K) 12W CREE LED Natural White (4000K) 12W CREE LED Warm White (3000K) 12W CREE LED Warm White (2700K) With Remote Led driver	Body: Aluminum Glass: Toughened Clear Glass.	
Technical Data		WK-71-64-702-1-6		
IP54 / Class III / CE / ▽	WK-71-64-702-1-12			
Colour				
Black				



Model No.	Size	Light Source	Application	Beam Angle
WK-71-64-801-600		6W CREE LED Cool White (6000K) 6W CREE LED Natural White (4000K) 6W CREE LED Warm White (3000K) With Remote Led driver	LED bar used to create striking play of light. Suitable for indoor illumination and bordering. Perfect for accentuating and contouring architectural elements and facades. For shop windows, shelves, signs, etc.	
Technical Data				
IP20 / Class III / CE / ▽				
Colour				
Aluminum				



Model No.	Size	Light Source	Application	Beam Angle
WK-71-64-801-300		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) With Remote Led driver	LED bar used to create striking play of light. Suitable for indoor illumination and bordering. Perfect for accentuating and contouring architectural elements and facades. For shop windows, shelves, signs, etc.	
Technical Data				
IP20 / Class III / CE / ▽				
Colour				
Aluminum				

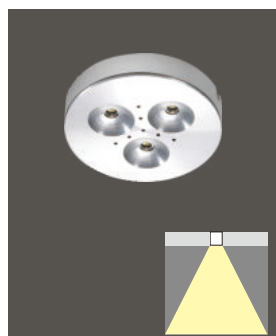

Model No.	Size	Light Source	Material	Beam Angle
WK-71-64-893		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) With Remote Led driver	Housing and trim: Aluminum LED: high-power LEDs on metal-core PCB.	
Technical Data				
IP20 / Class III / CE / ▽				
Colour				
Aluminum Black				

LED Cabinet & Linear Light




Model No.	Size	Light Source	Application
WK-71-64-703-4	 L:100mm	Power: 24VDC 1W / 1.2W 60/90lm Colour: Warm White / Cool White LED Qty.: 4 / 6pcs x 0.25W SMD LED Size: L: 100mm With Remote Led driver	LED bar used to create striking play of light. Suitable for indoor illumination and bordering. Perfect for accentuating and contouring architectural elements and facades. For shop windows, shelves, and walls, etc.
Colour	<input type="checkbox"/> Aluminum		

Model No.	Size	Light Source	Application
WK-71-64-703-9	 L:200mm	Power: 24VDC 1.8W/2.4W 135/180lm Colour: Warm White / Cool White LED Qty.: 9/12pcs x 0.2W SMD LED Size: L: 200mm With Remote Led driver	LED bar used to create striking play of light. Suitable for indoor illumination and bordering. Perfect for accentuating and contouring architectural elements and facades. For shop windows, shelves, and walls, etc.
Colour	<input type="checkbox"/> Aluminum		





Model No.	Size	Light Source	Application
WK-71-64-703-24	 L:500mm	Power: 24VDC 4.8W/6W 360/450lm Colour: Warm White / Cool White LED Qty.: 24/30pcs x 0.2W SMD LED Size: L:500mm With Remote Led driver	LED bar used to create striking play of light. Suitable for indoor illumination and bordering. Perfect for accentuating and contouring architectural elements and facades. For shop windows, shelves, and walls, etc.
Colour	<input type="checkbox"/> Aluminum		

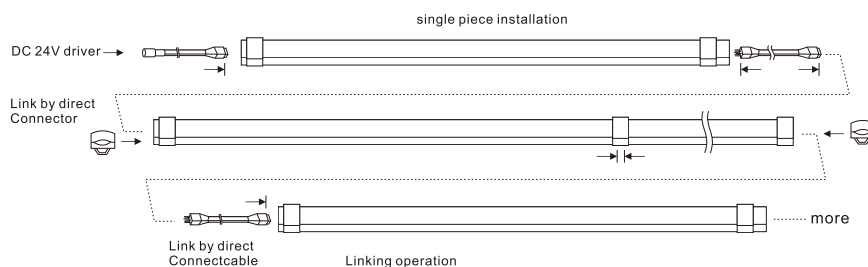



Model No.	Size	Light Source	Application
WK-71-64-703-48	 L:1000mm	Power: 24VDC 9.6W/12W 720/900lm Colour: Warm White / Cool White LED Qty.: 48/60pcs x 0.2W SMD LED Size: L: 1000mm With Remote Led driver	LED bar used to create striking play of light. Suitable for indoor illumination and bordering. Perfect for accentuating and contouring architectural elements and facades. For shop windows, shelves, and walls, etc.
Colour	<input type="checkbox"/> Aluminum		

















LED Outdoor Light

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-4450		0.8W LED Cool White (6000K) 0.8W LED Natural White (4000K) 0.8W LED Warm White (3000K) 0.8W LED Warm White (2700K) With Remote Led driver	Body&Trim: Aluminum Glass: Toughened Clear Glass Pre-casing: 304 Stainless Steel	 120°
	Technical Data				
	IP67 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Brushed Aluminum				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-4828		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Remote Led driver	Trim: 304 Stainless Steel (316 Stainless Steel on request) Collimating lens: PMMA. Pre-Casing: Aluminum	 120°
	Technical Data				
	IP67 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Brushed Stainless Steel (304) <input type="checkbox"/> Brushed Stainless Steel (316) (on request)				









	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-4050		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Remote Led driver	Trim: 304 Stainless Steel (316 Stainless Steel on request) Body: Aluminum Glass: Toughened Clear Glass Pre-Casing: PP Casing	
	Technical Data				
	IP67 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Brushed Stainless Steel (304) <input type="checkbox"/> Brushed Stainless Steel (316) (on request)				








	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-4051E		1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Blue / Green With Remote Led driver	Body&Trim: Aluminum Glass: Toughened Matt Glass Pre-Casing: Aluminum Gasket: Silicon Gasket	 120°
	Technical Data				
	IP67 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Aluminum				








	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-4052		1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Blue / Green With Remote Led driver	Top Plate: Aluminum (304 Stainless Steel / 316 Stainless Steel on request) Body: Aluminum Glass: Toughened Matt / Clear Glass Pre-Casing: Aluminum Gasket: Silicon Gasket	
	Technical Data				
	IP67 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Aluminum <input type="checkbox"/> Brushed Stainless Steel (304) <input type="checkbox"/> Brushed Stainless Steel (316) (on request)				








LED Outdoor Light










 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-1301		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) 3W CREE LED Red / Blue / Green With Integral Led driver	Top Plate: 304 Stainless Steel (316 Stainless Steel on request) Body: High Injection Die Cast Aluminum Glass: Toughened Matt Glass Pre-casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / 	Colour  Brushed Stainless Steel (304)  Brushed Stainless Steel (316) (on request)			

 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-4313		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) 3W CREE LED Red / Blue / Green With Remote Led driver	Body&Trim: Aluminum Glass: Toughened Matt Glass Pre-casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / 	Colour  Aluminum			






 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-4316		6W CREE LED Cool White (6000K) 6W CREE LED Natural White (4000K) 6W CREE LED Warm White (3000K) 6W CREE LED Warm White (2700K) 6W CREE LED Red / Blue / Green With Remote Led driver	Body&Trim: Aluminum Glass: Toughened Matt Glass Pre-casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / 	Colour  Aluminum			






 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-1201-HP		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Remote Led driver	Top Plate:304 Stainless Steel (316 Stainless Steel on request) Body :High Injection Die Casting Aluminum Glass: Toughened Matt / Clear Glass Pre-casing: PP Casing With Cover	
	Technical Data IP67 / Class III / Class I / CE / 	Colour  Brushed Stainless Steel (304)  Brushed Stainless Steel (316) (on request)	Option WK-71-42-1201-5-LED 5x0.04W CREE LED White / Red / Blue / Green (230V)		





 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-1202-HP		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) 3W CREE LED Red / Blue / Green With Integral Led driver	Top Plate:304 Stainless Steel (316 Stainless Steel on request) Body: High Injection Die Casting Aluminum Glass: Toughened Matt / Clear Glass Pre-casing: PP Casing With Cover	
	Technical Data IP67 / Class III / CE / 	Colour  Brushed Stainless Steel (304)  Brushed Stainless Steel (316) (on request)	Option WK-71-42-1202-13-LED 13x0.04W CREE LED Red / Blue / Green (230V)		











LED Outdoor Light

 	Model No. WK-71-42-4111	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Integral Led driver	Material Top Plate: 304 Stainless Steel (316 Stainless Steel on request) Body: High Injection Die Casting Aluminum Glass: Toughened Matt /Clear Glass Pre-casing: PP Casing With Cover Gasket: Silicon Gasket	Beam Angle 
	Technical Data IP67 / Class III / CE / ▽	Colour ■ Brushed Stainless Steel (304) ■ Brushed Stainless Steel (316) (on request)			

 	Model No. WK-71-42-4112	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Integral Led driver	Material Top Plate: 304 Stainless Steel (316 Stainless Steel on request) Body: High Injection Die Casting Aluminum Glass: Toughened Matt /Clear Glass Pre-casing: PP Casing With Cover Gasket: Silicon Gasket	Beam Angle 
	Technical Data IP67 / Class III / CE / ▽	Colour ■ Brushed Stainless Steel (304) ■ Brushed Stainless Steel (316) (on request)			






 	Model No. WK-71-42-4113	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Integral Led driver	Material Top Plate & Body: High Injection Die Casting Aluminum Glass: Toughened Clear Glass Pre-casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / ▽	Colour ■ Sand Black			





 	Model No. WK-71-42-4114	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Integral Led driver	Material Top Plate & Body: High Injection Die Casting Aluminum Glass: Toughened Clear Glass Pre-casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / ▽	Colour ■ Sand Black			





 	Model No. WK-71-42-4115	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Blue / Green With Integral Led driver	Material Top Plate & Body: High Injection Die Casting Aluminum Glass: Toughened Clear Glass Pre-casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / ▽	Colour ■ Sand Black			





LED Outdoor Light







 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-2201		15W Sharp LED Cool White (5000K) 15W Sharp LED Warm White (3000K) 15W Sharp LED Warm White (2700K) With Integral Led driver	Top Plate: 304 Stainless Steel (316 Stainless Steel on request) Body: High Injection Die Casting Aluminum Glass: Toughened Matt Glass Pre-Casing: PP Casing With Cover Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / ▽ Colour ■ Brushed Stainless Steel (304) ■ Brushed Stainless Steel (316) (on request)				





 	Model No.	Size	Light Source	Material	
	WK-71-42-2202		15W Sharp LED Cool White (5000K) 15W Sharp LED Warm White (3000K) 15W Sharp LED Warm White (2700K) With Integral Led driver	Top Plate & Body: High Injection Die Casting Aluminum Glass: Toughened Clear Glass Pre-Casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / ▽ Colour ■ Sand Black				

 	Model No.	Size	Light Source	Material	
	WK-71-42-2203		15W Sharp LED Cool White (5000K) 15W Sharp LED Warm White (3000K) 15W Sharp LED Warm White (2700K) With Integral Led driver	Top Plate & Body: High Injection Die Casting Aluminum Glass: Toughened Clear Glass Pre-Casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / ▽ Colour ■ Sand Black ■ Sand Grey				





 	Model No.	Size	Light Source	Material	
	WK-71-42-2204		15W Sharp LED Cool White (5000K) 15W Sharp LED Warm White (3000K) 15W Sharp LED Warm White (2700K) With Integral Led driver	Top Plate & Body: High Injection Die Casting Aluminum Glass: Toughened Clear Glass Pre-Casing: PP Casing Gasket: Silicon Gasket	
	Technical Data IP67 / Class III / CE / ▽ Colour ■ Sand Black ■ Sand Grey				

 	Model No.	Size	Light Source	Material	
	WK-71-90-9007		15W Sharp LED Cool White (5000K) 15W Sharp LED Warm White (3000K) 15W Sharp LED Warm White (2700K) With Integral Led driver	Body: High Injection Die Casting Aluminum Diffuser: PMMA	
	Technical Data IP65 / Class III / CE / ▽ Colour ■ Black				









	Model No.	Size	Light Source	Material
	WK-71-42-7011A		2160lm 22W Cool White(6000K) 2160lm 22W Warm White(3000K) With Integral Led driver	Body: High Injection Die Casting Aluminum Diffuser: Opal PC Led: Ultra Bright 5630 Samsung (Single chip)
	Technical Data			
	IP55 / Class III / CE / ▽			
Colour	■ Sand Black ■ Sand Grey	 (OSRAM SMD LED on request)		





NEW!

	Model No.	Size	Light Source	Material
	WK-71-42-7011B		3240lm 33W Cool White(6000K) 3240lm 33W Warm White(3000K) With Integral Led driver	Body: High Injection Die Casting Aluminum Diffuser: Opal PC Led: Ultra Bright 5630 Samsung (Single chip)
	Technical Data			
	IP55 / Class III / CE / ▽			
Colour	■ Sand Black ■ Sand Grey	 (OSRAM SMD LED on request)		

NEW!

	Model No.	Size	Light Source	Material
	WK-71-42-WL30		30W CREE LED Cool White (6000K) 30W CREE LED Natural White (4000K) 30W CREE LED Warm White (3000K) 30W CREE LED Warm White (2700K) With Integral Led driver	Die cast aluminum housing, borosilicate glass diffuser Reflector: Aluminum reflector
	Technical Data			
	IP55 / Class III / CE / ▽			
Colour	■ Black			






	Model No.	Size	Light Source	Material
	WK-71-42-WL48		48W CREE LED Cool White (6000K) 48W CREE LED Natural White (4000K) 48W CREE LED Warm White (3000K) 48W CREE LED Warm White (2700K) With Integral Led driver	Die cast aluminum housing, borosilicate glass diffuser Reflector: Aluminum reflector
	Technical Data			
	IP55 / Class III / CE / ▽			
Colour	■ Black			






	Model No.	Size	Light Source	Material
	WK-71-42-HBL120 WK-71-42-HBL250		120W CREE LED Cool White (5000K) 120W CREE LED Warm White (3000K) 250W CREE LED Cool White (5000K) 250W CREE LED Warm White (3000K) With Integral Led driver	Die cast aluminum housing, Diffuser: Clear tempered glass Reflector: Aluminum reflector
	Technical Data			
	IP65 / Class III / CE / ▽			
Colour	■ Silver Sand			






NEW!



LED Outdoor Light










	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-5016		3W CREE Cool White (5000K) 3W CREE Natural White (4000K) 3W CREE Warm White (3000K) 3W CREE Warm White (2700K) With Integral Led driver	Body: High Injection Die Casting Aluminum	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> Sand Black <div style="width: 10px; height: 10px; background-color: grey; border: 1px solid black;"></div> Silver Grey </div>				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-5017		6W CREE Cool White (5000K) 6W CREE Natural White (4000K) 6W CREE Warm White (3000K) 6W CREE Warm White (2700K) With Integral Led driver	Body: High Injection Die Casting Aluminum	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> Sand Black <div style="width: 10px; height: 10px; background-color: grey; border: 1px solid black;"></div> Silver Grey </div>				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-7148		Philips 4W LED Gu5.3 Philips 10W LED Gu5.3 Philips 10W dimmable LED Gu5.3 With integral Philips EI60 12V50W electronic transformer	Body: High Injection Die Casting Aluminum	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> Black <div style="width: 10px; height: 10px; background-color: grey; border: 1px solid black;"></div> Silver Grey </div>				



Option			
WK-42-7144	WK-42-7148	WK-71-42-7144	WK-71-42-7146




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-7188		Philips 4W LED Philips 10W dimmable LED With integral Philips EI60 12V50W electronic transformer	Body: High Injection Die Casting Aluminum	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<div style="display: flex; gap: 5px;"> <div style="width: 10px; height: 10px; background-color: black; border: 1px solid black;"></div> Black <div style="width: 10px; height: 10px; background-color: grey; border: 1px solid black;"></div> Silver Grey </div>				





Option			
WK-71-42-7181	WK-42-7188	WK-71-42-7181	WK-71-42-7186







LED Outdoor Light

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-9003-12		12W CREE LED Cool White (6000K) 12W CREE LED Natural White (4000K) 12W CREE LED Warm White (3000K) 12W CREE LED Warm White (2700K) With Remote Led driver	Body: Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Aluminum <input checked="" type="checkbox"/> Silver Grey				



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-9003-24		24W CREE LED Cool White (6000K) 24W CREE LED Natural White (4000K) 24W CREE LED Warm White (3000K) 24W CREE LED Warm White (2700K) With Remote Led driver	Body: Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Aluminum <input checked="" type="checkbox"/> Silver Grey				



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-9005-14		14W CREE LED Cool White (6000K) 14W CREE LED Natural White (4000K) 14W CREE LED Warm White (3000K) 14W CREE LED Warm White (2700K) With Remote or Integral Led driver	Body: Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<input checked="" type="checkbox"/> Silver Grey				



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-42-9005-28		28W CREE LED Cool White (6000K) 28W CREE LED Natural White (4000K) 28W CREE LED Warm White (3000K) 28W CREE LED Warm White (2700K) With Remote or Integral Led driver	Body: Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour	<input checked="" type="checkbox"/> Silver Grey				



LED Outdoor Light



	Model No.	Size	Light Source	Material
	WK-71-42-9006-36 Technical Data IP65 / Class III / CE / ▽ Colour Aluminum		36W Osram LED Cool White (6000K) 36W Osram LED Natural White (4000K) 36W Osram LED Warm White (3000K) 36W Osram LED Warm White (2700K) With Remote Led driver	Body: Aluminum Glass: Toughened Clear Glass




	Model No.	Size	Light Source	
	WK-71-42-9007-36 Technical Data IP65 / Class III / CE / ▽ Colour Aluminum		Osram 18W RGB 600mm (DMX 512 Control system) 18W Dynamic White (Colour change-3000K-6000K) Warm White 3000K (12x1W)+ Cool White (6x1W) 600mm (DMX 512 Control system) Osram 18W Warm White LED 3000K 600mm Osram 18W Natural White LED 4000K 600mm Osram 18W Cool White LED 6500K 600mm 36W RGB 1200mm (DMX 512 Control system) 36W Dynamic White (Colour change-3000K-6000K) Warm White 3000K (24x1W)+ Cool White (6x1W) 1200mm (DMX 512 Control system) Osram 36W Warm White LED 3000K 1200mm Osram 36W Natural White LED 4000K 1200mm Osram 36W Cool White LED 6000K 1200mm With Remote Led driver	





	Model No.	Size	Light Source	Material
	D-PRO-48-350mA-DMX		Input Voltage 48V1A Power Consumption 50W Output 48V Constant Current 350mA (12 LED Max)/ channel Control Channel (36 LED Max)/3 channels Data Protocol DMX 512 DMX Address Selection 1-505 via Dip switch. Size 44.2 (W) x 276 (L) x 21.3 (H)	Housing: Steel




	Model No.	Size	Light Source	Material
	D-PRO-24-350mA-DMX		Input Voltage 24V1A Power Consumption 25W Output 24V Constant Current 350mA (6 LED Max)/ channel Control Channel (18 LED Max)/3 channels Data Protocol DMX 512 DMX Address Selection 1-505 via Dip switch. Size 44.2 (W) x 276 (L) x 21.3 (H)	Housing: Steel













LED Track Light & Ceiling Lamp

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-87-221		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Integral Led driver	Body: Cast Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	
	Technical Data				
Colour	<input type="checkbox"/> White <input type="checkbox"/> Black				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-87-613		9W CREE LED Cool White (6000K) 9W CREE LED Natural White (4000K) 9W CREE LED Warm White (3000K) 9W CREE LED Warm White (2700K) With Integral Led driver	Body: Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	
	Technical Data				
Colour	<input type="checkbox"/> White <input type="checkbox"/> Black				
	Option				WK-71-87-611









	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-66-6018		8W / 18W CREE LED Cool White (6000K) 8W / 18W CREE LED Natural White (4000K) 8W / 18W CREE LED Warm White (3000K) 8W / 18W CREE LED Warm White (2700K) With Integral Led driver	Body: Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	
	Technical Data				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	
	WK-71-89-9360-DLMI		1100lm 16W / 830 (3000K) 1100lm 15W / 835 (3500K) 1100lm 14W / 840 (4000K) 2000lm 28W / 830 (3000K) 2000lm 27W / 835 (3500K) 2000lm 26W / 840 (4000K) With integral LED Driver	Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Aluminum. LED: high-power LEDs on metal-core PCB.	
	Technical Data				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				
					

	Model No.	Size	Light Source	Material	
	WK-71-89-6003-DLMI		1100lm 14W / 830 (3000K) 1100lm 13W / 835 (3500K) 1100lm 12W / 840 (4000K) 2000lm 28W / 830 (3000K) 2000lm 27W / 835 (3500K) 2000lm 26W / 840 (4000K) 3000lm 43W / 830 (3000K) 3000lm 42W / 835 (3500K) 3000lm 41W / 840 (4000K) With integral LED Driver	Diffuser: Clear Tempered Glass Reflector: Polished/Matt Reflector Heat Sink: Die cast aluminum. Housing: Aluminum. LED: high-power LEDs on metal-core PCB.	
	Technical Data				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				
					








LED Ceiling Lamp



 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-89-1049		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) With Integral Led driver	Body: Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	  
	Technical Data	 			
	IP44 / Class III / CE / 	Colour			









- Silver Sand
- Black
- White



 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-89-1049H		5W / 10W CREE LED Cool White (6000K) 5W / 10W CREE LED Natural White (4000K) 5W / 10W CREE LED Warm White (3000K) 5W / 10W CREE LED Warm White (2700K) With Integral Led driver	Body: Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	 
	Technical Data	 			
	IP44 / Class III / CE / 	Colour			









- Silver Sand
- Black
- White



 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-89-95201S		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) With Integral Led driver	Body: Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	  
	Technical Data	 			
	IP54 / Class I / CE / 	Colour			









- Silver Sand
- Black
- White



 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-89-952301		9W CREE LED Cool White (6000K) 9W CREE LED Natural White (4000K) 9W CREE LED Warm White (3000K) 9W CREE LED Warm White (2700K) With Integral Led driver	Body: Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	  
	Technical Data	 			
	IP54 / Class III / CE / 	Colour			

- Silver Sand
- Black
- White







 	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-89-952381		15W SHARP LED Cool White (5000K) 15W SHARP LED Natural White (4000K) 15W SHARP LED Warm White (3000K) With Integral Led driver	Body: Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	  
	Technical Data	 			
	IP54 / Class III / CE / 	Colour			





- Silver Sand
- Black
- White













LED Showcase Lamp

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-901		2W CREE LED Cool White (6000K) 2W CREE LED Natural White (4000K) 2W CREE LED Warm White (3000K) With Remote Led driver	Brass & Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	
	Technical Data				
	IP20 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Chrome <input type="checkbox"/> Black				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-902S		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) With Remote Led driver	Brass & Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	
	Technical Data				
	IP20 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Chrome <input type="checkbox"/> Black				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-921		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) With Remote Led driver	Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	
	Technical Data				
	IP20 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Silver grey <input type="checkbox"/> Black				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-999		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) With Remote Led driver	Aluminum LED: high-power LEDs on metal-core PCB.	
	Technical Data				
	IP20 / Class III / CE / ▽				
Colour	<input type="checkbox"/> Chrome <input type="checkbox"/> Black <input type="checkbox"/> Silver Sand				




LED Showcase Lamp






	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-811	Ø35	1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) With Remote Led driver	Aluminum LED: high-power LEDs on metal-core PCB.	90°
	Technical Data	29			
	IP20 / Class III / CE / ▽	Ø42			
Colour	<input type="checkbox"/> Aluminum <input type="checkbox"/> Black				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-812	Ø44	1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) With Remote Led driver	Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	20° 40° 60°
	Technical Data	29			
	IP44 / Class III / CE / ▽	Ø52			
Colour	<input type="checkbox"/> Aluminum <input type="checkbox"/> Black	0°-40° tilt			
















	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-813	Ø44	1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) With Remote Led driver	Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	20° 40° 60°
	Technical Data	29			
	IP44 / Class III / CE / ▽	Ø52			
Colour	<input type="checkbox"/> Aluminum <input type="checkbox"/> Black	0°-30° tilt			

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-814	Ø44	1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) With Remote Led driver	Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	20° 40° 60°
	Technical Data	29			
	IP44 / Class III / CE / ▽	Ø52			
Colour	<input type="checkbox"/> Aluminum <input type="checkbox"/> Black	0°-30° tilt			

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-62-820S	Ø36	1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) With Remote Led driver	Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.	20° 40° 60°
	Technical Data	25			
	IP44 / Class III / CE / ▽	Ø39.6			
Colour	<input type="checkbox"/> Aluminum <input type="checkbox"/> Black				











LED Showcase Lamp





 	<p>Model No. WK-71-62-838</p> <p>Technical Data IP44 / Class III / CE / ▽</p> <p>Colour ■ Black</p>	<p>Size</p> 	<p>Light Source</p> <p>1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.</p>	<p>Beam Angle</p> 
 	<p>Model No. WK-71-62-839</p> <p>Technical Data IP44 / Class III / CE / ▽</p> <p>Colour ■ Black</p>	<p>Size</p> 	<p>Light Source</p> <p>1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.</p>	<p>Beam Angle</p> 
 	<p>Model No. WK-71-62-840</p> <p>Technical Data IP44 / Class III / CE / ▽</p> <p>Colour ■ Black ■ Aluminum</p>	<p>Size</p> 	<p>Light Source</p> <p>1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Aluminum LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.</p>	<p>Beam Angle</p> 





LED Outdoor Recessed Wall Light










	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-9001		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) 3W CREE LED Red / Green / Blue With Integral Led driver 	Body: High Injection Die Cast Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class I / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Sand Black <input type="checkbox"/> Sand White				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-9002		3Wx2 CREE LED Cool White (6000K) 3Wx2 CREE LED Natural White (4000K) 3Wx2 CREE LED Warm White (3000K) 3Wx2 CREE LED Warm White (2700K) 3Wx2 CREE LED Red / Green / Blue With Integral Led driver 	Body: High Injection Die Cast Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class I / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Sand Black <input type="checkbox"/> Sand White				




	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-7001		3W CREE LED Cool White (6000K) 3W CREE LED Natural White (4000K) 3W CREE LED Warm White (3000K) 3W CREE LED Warm White (2700K) 3W CREE LED Red / Green / Blue With Integral Led driver 	Body: High Injection Die Cast Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class I / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Sand Black <input type="checkbox"/> Sand White				



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-7002		3Wx2 CREE LED Cool White (6000K) 3Wx2 CREE LED Natural White (4000K) 3Wx2 CREE LED Warm White (3000K) 3Wx2 CREE LED Warm White (2700K) 3Wx2 CREE LED Red / Green / Blue With Integral Led driver 	Body: High Injection Die Cast Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class I / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Sand Black <input type="checkbox"/> Sand White				



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-8001		15W SHARP LED Cool White (5000K) 15W SHARP LED Warm White (3000K) 15W SHARP LED Warm White (2700K) With Integral Led driver 	Body: High Injection Die Cast Aluminum Glass: Toughened Clear Glass	
	Technical Data				
	IP65 / Class III / CE / ▽				
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Sand Black <input type="checkbox"/> Sand White				

	Model No. WK-71-85-8002	Size 	Light Source 15Wx2 SHARP LED Cool White (5000K) 15Wx2 SHARP LED Warm White (3000K) 15Wx2 SHARP LED Warm White (2700K) With Integral Led driver	Material Body: High Injection Die Cast Aluminum Glass: Toughened Clear Glass	Beam Angle 
	Technical Data IP65 / Class III / CE / ▽	Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Sand Black <input type="checkbox"/> Sand White	SHARP		

	Model No. WK-71-85-6001	Size 	Light Source 15W SHARP LED Cool White (5000K) 15W SHARP LED Warm White (3000K) 15W SHARP LED Warm White (2700K) With Integral Led driver	Material Body: High Injection Die Cast Aluminum Glass: Toughened Matt/Clear Glass	Beam Angle 
	Technical Data IP65 / Class III / CE / ▽	Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Sand Black <input type="checkbox"/> Sand White	SHARP		






	Model No. WK-71-85-6002	Size 	Light Source 15Wx2 SHARP LED Cool White (5000K) 15Wx2 SHARP LED Warm White (3000K) 15Wx2 SHARP LED Warm White (2700K) With Integral Led driver	Material Body: High Injection Die Cast Aluminum Glass: Toughened Matt/Clear Glass	Beam Angle 
	Technical Data IP65 / Class III / CE / ▽	Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Sand Black <input type="checkbox"/> Sand White	SHARP		






	Model No. WK-71-85-5001	Size 	Light Source 0.6W LED Cool White 0.6W LED Warm White 0.6W LED Red/Green/Blue Integral 230V LED Driver	Material Body: Die Cast Aluminum Diffuser: Clear PC Pre-Casing: PP casing	
	Technical Data IP65 / Class I / CE / ▽	Colour <input checked="" type="checkbox"/> Silver Sand	SHARP		





	Model No. WK-71-85-5002	Size 	Light Source 0.6W LED Cool White 0.6W LED Warm White 0.6W LED Red/Green/Blue Integral 230V LED Driver	Material Body: Die Cast Aluminum Diffuser: Clear PC Pre-Casing: PP casing	
	Technical Data IP65 / Class III / CE / ▽	Colour <input checked="" type="checkbox"/> Silver Sand	SHARP		





LED Outdoor Recessed Wall Light







	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-5201		1Wx2 CREE LED Cool White (6000K) 1Wx2 CREE LED Natural White (4000K) 1Wx2 CREE LED Warm White (3000K) 1Wx2 CREE LED Warm White (2700K) 1Wx2 CREE LED Red / Green / Blue 3Wx2 CREE LED Cool White (6000K) 3Wx2 CREE LED Natural White (4000K) 3Wx2 CREE LED Warm White (3000K) 3Wx2 CREE LED Warm White (2700K) 3Wx2 CREE LED Red / Green / Blue With Integral Led driver 	Body: Aluminum & Steel LED: High-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP20 / Class III / CE / 				
Colour	<input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Aluminum				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-85-5046		3Wx2 CREE LED Cool White (6000K) 3Wx2 CREE LED Natural White (4000K) 3Wx2 CREE LED Warm White (3000K) 3Wx2 CREE LED Warm White (2700K) 3Wx2 CREE LED Red / Green / Blue With Integral Led driver 	Body: Aluminum & Steel LED: High-power LEDs on metal-core PCB. Collimating lens: PMMA	
	Technical Data				
	IP20 / Class III / CE / 				
Colour	<input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Aluminum				




	Model No.	Size	Light Source	Material	
	WK-71-85-3001-HP-LED		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Green / Blue With Remote Led driver 	Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel	
	Technical Data				
	IP44 / Class I / Class III / CE / 				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> White				




	Model No.	Size	Light Source	Material	
	WK-71-85-3002-HP-LED		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Green / Blue With Remote Led driver 	Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel	
	Technical Data				
	IP44 / Class I / Class III / CE / 				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> White				




	Model No.	Size	Light Source	Material	
	WK-71-85-3003-HP-LED		1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Green / Blue With Remote Led driver 	Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel	
	Technical Data				
	IP44 / Class I / Class III / CE / 				
Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> White				









LED Indoor Recessed Wall Light

	Model No. WK-71-85-3004-HP-LED	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Green / Blue With Remote Led driver	Material Trim: Die Cast Aluminum Diffuser: Tempered Matt Glass Reflector: Matt Reflector Housing: Steel
	Technical Data IP20 / Class I / Class III / CE / ▽ Colour Silver Sand White			

	Model No. WK-71-85-3005-HP-LED	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Green / Blue With Remote Led driver	Material Trim: Die Cast Aluminum Diffuser: Tempered Matt Glass Reflector: Matt Reflector Housing: Steel
	Technical Data IP20 / Class I / Class III / CE / ▽ Colour Silver Sand White			



	Model No. WK-71-85-3006-HP-LED	Size 	Light Source 1W CREE LED Cool White (6000K) 1W CREE LED Natural White (4000K) 1W CREE LED Warm White (3000K) 1W CREE LED Warm White (2700K) 1W CREE LED Red / Green / Blue With Remote Led driver	Material Trim: Die Cast Aluminum Diffuser: Tempered Matt Glass Reflector: Matt Reflector Housing: Steel
	Technical Data IP20 / Class I / Class III / CE / ▽ Colour Silver Sand White			



	Model No. WK-71-85-3001-9-LED	Size 	Light Source 9x0.06W LED(230V) Cool White / Warm White Red / Green/Blue / White Integral 230V LED Driver	Material Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel
	Technical Data IP44 / Class I / Class III / CE / ▽ Colour Silver Sand Black White			



	Model No. WK-71-85-3001-H-9-LED	Size 	Light Source 9x0.06W LED(230V) Cool White / Warm White Red / Green/Blue / White Integral 230V LED Driver	Material Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel
	Technical Data IP44 / Class I / Class III / CE / ▽ Colour Silver Sand Black White			



LED Indoor Recessed Wall Light





	Model No.	Size	Light Source	Material
	WK-71-85-3001-4-LED		4x0.06W LED(230V) Cool White / Warm White Red / Green / Blue / White Integral 230V LED Driver	Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel
	Technical Data			
IP44 / Class I / Class III / CE / ▽	Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		

	Model No.	Size	Light Source	Material
	WK-71-85-3002-4-LED		4x0.06W LED(230V) Cool White / Warm White Red / Green / Blue / White Integral 230V LED Driver	Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel
	Technical Data			
IP44 / Class I / Class III / CE / ▽	Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		




	Model No.	Size	Light Source	Material
	WK-71-85-3003-4-LED		4x0.06W LED(230V) Cool White / Warm White Red / Green / Blue / White Integral 230V LED Driver	Trim: Die Cast Aluminum Diffuser: White PMMA Housing: Steel
	Technical Data			
IP44 / Class I / Class III / CE / ▽	Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		




	Model No.	Size	Light Source	Material
	WK-71-85-4023		1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver	Trim: Die Cast Aluminum Diffuser: Tempered Matt Glass Reflector: Matt Reflector Housing: Steel
	Technical Data			
IP44 / Class I / CE / ▽	Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		




	Model No.	Size	Light Source	Material
	WK-71-85-4024		1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver	Trim: Die Cast Aluminum Diffuser: Tempered Matt Glass Reflector: Matt Reflector Housing: Steel
	Technical Data			
IP44 / Class III / CE / ▽	Colour	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White		









LED Indoor Recessed Wall Light

	Model No. WK-71-85-4025	Size 	Light Source 1Wx2 CREE LED Cool White (6000K) 1Wx2 CREE LED Natural White (4000K) 1Wx2 CREE LED Warm White (3000K) 1Wx2 CREE LED Warm White (2700K) 1Wx2 CREE LED Red / Green / Blue 3Wx2 CREE LED Cool White (6000K) 3Wx2 CREE LED Natural White (4000K) 3Wx2 CREE LED Warm White (3000K) 3Wx2 CREE LED Warm White (2700K) 3Wx2 CREE LED Red / Green / Blue With Remote Led driver 	Material Trim: Die Cast Aluminum Diffuser: Tempered Matt Glass Reflector: Matt Reflector Housing: Steel
	Technical Data IP44 / Class I / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Black <input type="checkbox"/> White			

	Model No. WK-71-85-4026	Size 	Light Source 1Wx2 CREE LED Cool White (6000K) 1Wx2 CREE LED Natural White (4000K) 1Wx2 CREE LED Warm White (3000K) 1Wx2 CREE LED Warm White (2700K) 1Wx2 CREE LED Red / Green / Blue 3Wx2 CREE LED Cool White (6000K) 3Wx2 CREE LED Natural White (4000K) 3Wx2 CREE LED Warm White (3000K) 3Wx2 CREE LED Warm White (2700K) 3Wx2 CREE LED Red / Green / Blue With Remote Led driver 	Material Trim: Die Cast Aluminum Diffuser: Tempered Matt Glass Reflector: Matt Reflector Housing: Steel
	Technical Data IP44 / Class I / CE / ▽ Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Black <input type="checkbox"/> White			





	Model No. WK-71-85-311-1 (One Way)	Size 	Light Source 1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver 	Material Body: Aluminum
	Technical Data IP65 / Class III / CE / ▽ (IP65 on request) Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Black			





	Model No. WK-71-85-312-1 (One Way)	Size 	Light Source 1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver 	Material Body: Aluminum
	Technical Data IP65 / Class III / CE / ▽ (IP65 on request) Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Black			





	Model No. WK-71-85-313-1 (One Way)	Size 	Light Source 1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver 	Material Body: Aluminum
	Technical Data IP65 / Class III / CE / ▽ (IP65 on request) Colour <input type="checkbox"/> Silver Sand <input checked="" type="checkbox"/> Black			

LED Indoor Recessed Wall Light




 	Model No. WK-71-85-311-2 (Two Way)	Size 	Light Source 1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver	Material Body: Aluminum
	Technical Data IP65 / Class III / CE / ▽ (IP65 on request)	Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black		

 	Model No. WK-71-85-312-2 (Two Way)	Size 	Light Source 1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver	Material Body: Aluminum
	Technical Data IP65 / Class III / CE / ▽ (IP65 on request)	Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black		

 	Model No. WK-71-85-313-2 (Two Way)	Size 	Light Source 1W / 3W CREE LED Cool White (6000K) 1W / 3W CREE LED Natural White (4000K) 1W / 3W CREE LED Warm White (3000K) 1W / 3W CREE LED Warm White (2700K) 1W / 3W CREE LED Red / Green / Blue With Remote Led driver	Material Body: Aluminum
	Technical Data IP65 / Class III / CE / ▽ (IP65 on request)	Colour <input type="checkbox"/> Silver Sand <input type="checkbox"/> Black		



LED Reading Lamp



Chrome



Material:

Aluminum & Steel
 LED: high-power LEDs on metal-core PCB.
 Collimating lens: PMMA.

WK-71-63-712








LIGHT SOURCE

- 1W / 2W CREE LED Cool White (6000K)
- 1W / 2W CREE LED Natural White (4000K)
- 1W / 2W CREE LED Warm White (3000K)
- 1W / 2W CREE LED Warm White (2700K)


Technical Data

IP44 / Class III / CE / ▽

Beam Angle

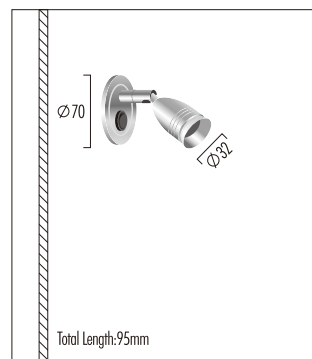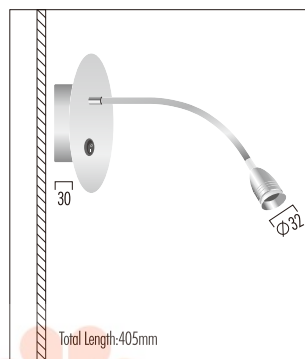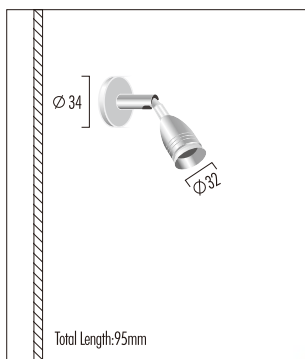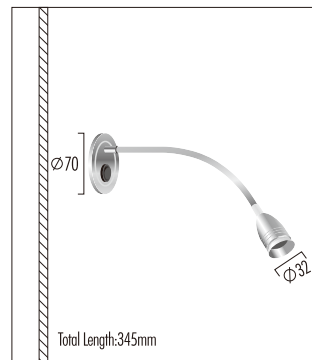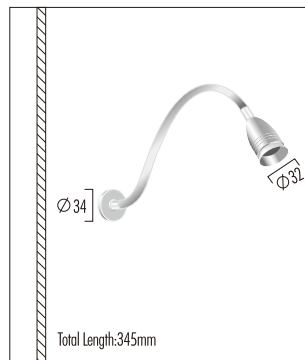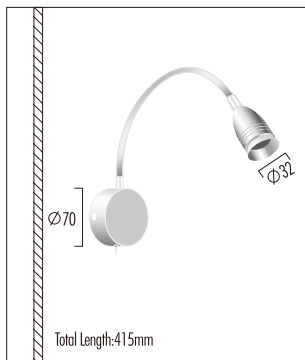

LED Reading Lamp



Chrome



Material:

Aluminum & Steel
 LED: high-power LEDs on metal-core PCB.
 Collimating lens: PMMA.

WK-71-63-714









LIGHT SOURCE

- 1W / 2W CREE LED Cool White (6000K)
- 1W / 2W CREE LED Natural White (4000K)
- 1W / 2W CREE LED Warm White (3000K)
- 1W / 2W CREE LED Warm White (2700K)

Technical Data


IP44 / Class III / CE / ▽

Beam Angle

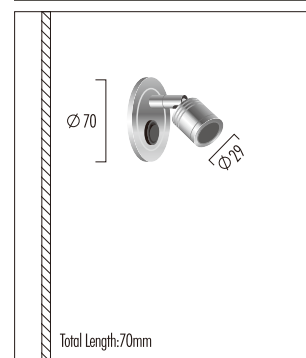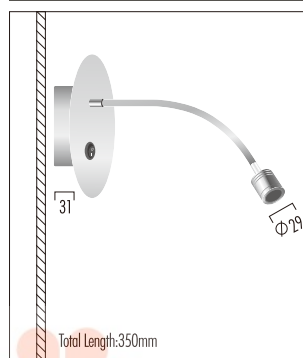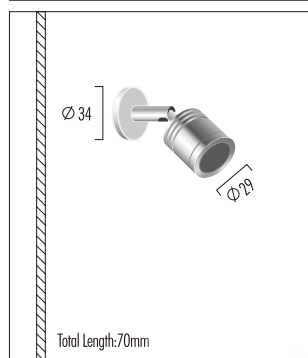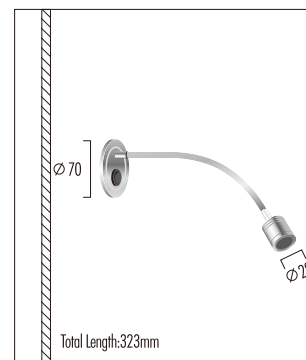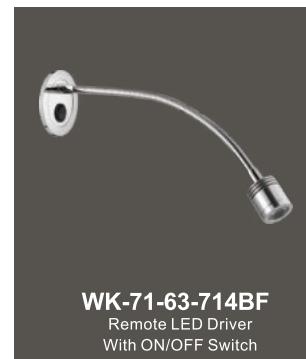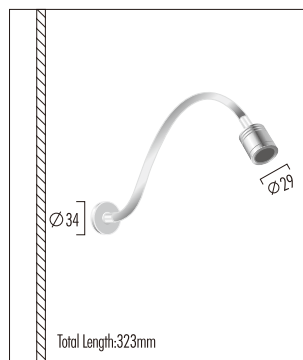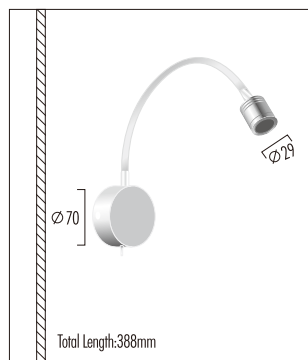



LED Reading Lamp



Chrome



Material:

Aluminum & Steel
 LED: high-power LEDs on metal-core PCB.
 Collimating lens: PMMA.

WK-71-63-718








LIGHT SOURCE

- 1W CREE LED Cool White (6000K)
- 1W CREE LED Natural White (4000K)
- 1W CREE LED Warm White (3000K)
- 1W CREE LED Warm White (2700K)


Technical Data

IP44 / Class III / CE / ▽

Beam Angle

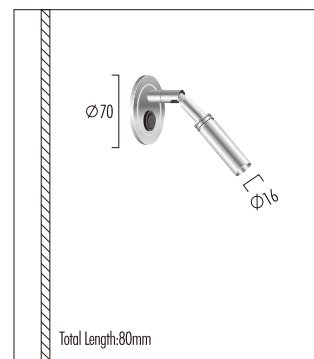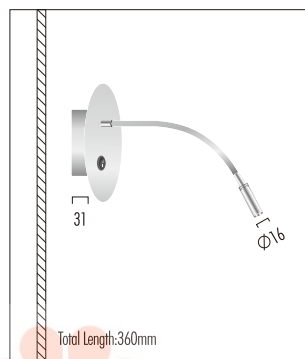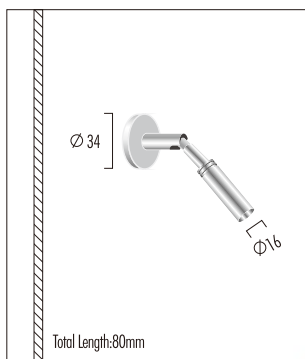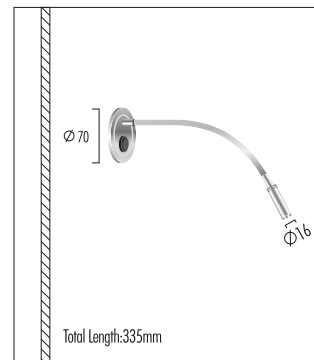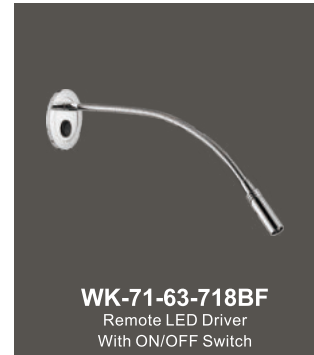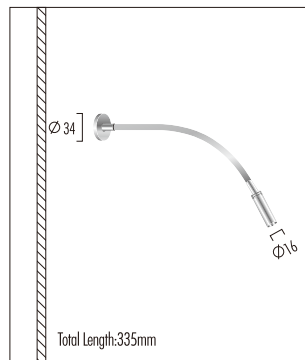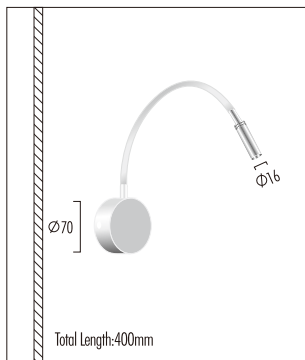

LED Reading Lamp



Chrome



Material:

Aluminum & Steel
LED: high-power LEDs on metal-core PCB.
Collimating lens: PMMA.

WK-71-63-719











LIGHT SOURCE

- 1W / 2W CREE LED Cool White (6000K)
- 1W / 2W CREE LED Natural White (4000K)
- 1W / 2W CREE LED Warm White (3000K)
- 1W / 2W CREE LED Warm White (2700K)

Technical Data










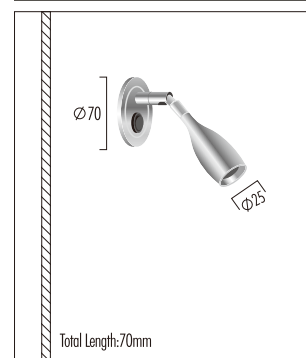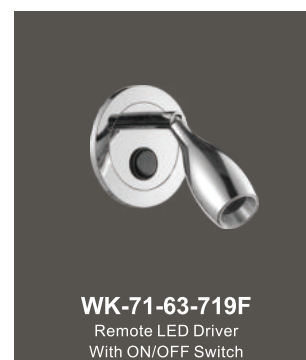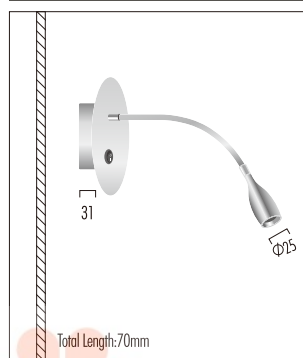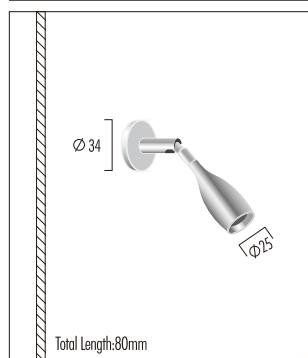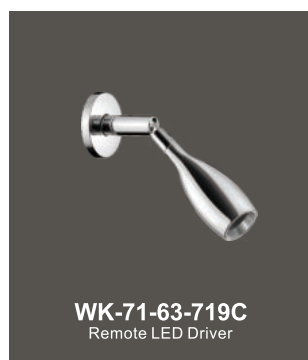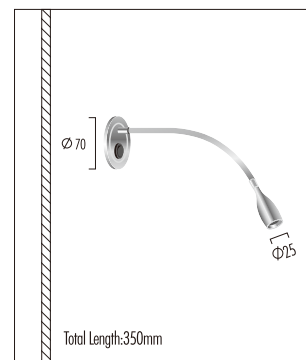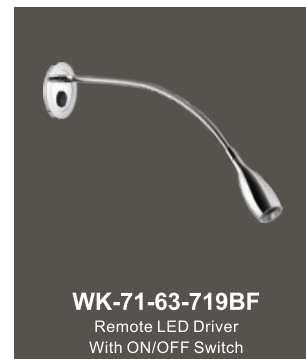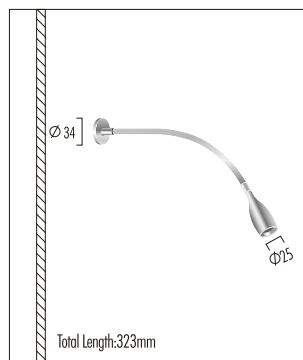
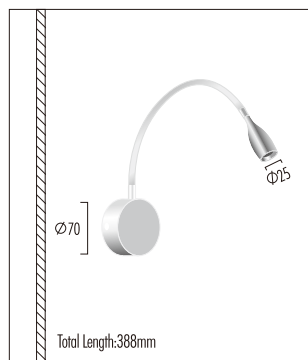




IP44 / Class III / CE /

Beam Angle





LED Reading Lamp

	<p>Model No. WK-71-63-715R</p> <p>Technical Data IP44 / Class III / CE / ▽</p> <p>Colour Chrome</p>	<p>Size</p>  <p>Total Length: 175mm</p> 	<p>Light Source</p> <p>1W CREE Cool White (6000K) 1W CREE Natural White (4000K) 1W CREE Warm White (3000K) 1W CREE Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Brass & Steel LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.</p>	<p>Beam Angle</p> 
	<p>Model No. WK-71-63-718BR</p> <p>Technical Data IP44 / Class III / CE / ▽</p> <p>Colour Chrome</p>	<p>Size</p>  <p>Total Length: 350mm</p> 	<p>Light Source</p> <p>1W CREE Cool White (6000K) 1W CREE Natural White (4000K) 1W CREE Warm White (3000K) 1W CREE Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Aluminum & Steel LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.</p>	<p>Beam Angle</p> 
 <p>ON/OFF on head</p>	<p>Model No. WK-71-63-711B-H10</p> <p>Technical Data IP44 / Class III / CE / ▽</p> <p>Colour Chrome</p>	<p>Size</p>  <p>Total Length: 550mm</p> 	<p>Light Source</p> <p>1W CREE Cool White (6000K) 1W CREE Natural White (4000K) 1W CREE Warm White (3000K) 1W CREE Warm White (2700K) With Remote Led driver</p> 	<p>Material</p> <p>Aluminum & Steel LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA.</p>	<p>Beam Angle</p> 

LED Lamp & Module



	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-TD-01-7		7W Sharp Natural White (4000K) 7W Sharp Warm White (3000K) 7W Sharp Warm White (2700K) With Remote Led driver	Body and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Reflector: PMMA Diffuser: Clear tempered glass	
	Technical Data		CR1:>90		
	IP44 / Class III / CE / ▽		SHARP		
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-TD-01-10		10W CREE LED Cool White (6000K) 10W CREE LED Natural White (4000K) 10W CREE LED Warm White (3000K) 10W CREE LED Warm White (2700K) With Remote Led driver	Body and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Diffuser: Clear tempered glass	
	Technical Data		CR1:>80		
	IP44 / Class III / CE / ▽		CREE		
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-TD-01-14 / 18		14W /18W CREE LED Cool White (6000K) 14W /18W CREE LED Natural White (4000K) 14W /18W CREE LED Warm White (3000K) 14W /18W CREE LED Warm White (2700K) With Remote Led driver	Body and trim: Aluminum, designed as heat sink. LED: high-power LEDs on metal-core PCB. Collimating lens: PMMA Diffuser: Clear tempered glass	
	Technical Data		CR1:>80		
	IP44 / Class III / CE / ▽		CREE		
Colour					
	<input type="checkbox"/> Silver Sand <input type="checkbox"/> Black <input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-TL-01-7-dim		7W 500lm LED E27 Cool White (5600K) 7W 300lm LED E27 Warm White (3000K) 0~100% dimmable range With integral Led driver	Body: Aluminum. Diffuser: Milky white glass.	
	Technical Data		CR1:>80 AC:220V 50~60Hz		
	CE / CCC / PSE		SAMSUNG		
Colour					
	<input type="checkbox"/> White				

	Model No.	Size	Light Source	Material	Beam Angle
	WK-71-TL-02-6		6W 550lm LED E27 Cool White (6500K) 6W 520lm LED E27 Warm White (3500K) 6W 480lm LED E27 Warm White (2700K) With integral Led driver	Body: Aluminum. Diffuser: Clear glass or Milky white glass.	
	Technical Data		CR1:>70 AC:220V 50~60Hz		
	IP40 / Class III / CE / ▽		SAMSUNG		
Colour					
	<input type="checkbox"/> Silver Sand				

TN01-Maxi

Input Voltage

220-240V

Output

43VDC C.C.350mA 12W for
12pcs x1W white colour LED

43VDC C.C.500mA 12W for
10pcs x2W white colour LED

36VDC C.C.700mA 9W for
9pcs x3W white colour LED

Size

L103xW67xH22



-Multi power driver supplied with dip switch for the selection of output current.

-Light regulation 0-100% by means of PUSH function (Lmains voltage: 170Kohm).

1)short push-ON/OFF

2)Long Push-Increase/decrease the light intensity, regulation automatically stop at Min. or Max.values.

3)Memory function-memory previous light intensity.

-Max. Length of the cable, from push button to last driver, must be max.15M, keep this separate from the 110-240V mains cable.

-Synchronization cable is separate supply.

-Caution: only use normally open push button with no incorporated warning light.

-Max. 10 LED drivers in series controlled by one or more push buttons.

-Light regulation 10-100% by means of PUSH function, 1..10V interface (I=.35A) or 100Kohm Potentiometer.


-Input & output terminals on the same side terminal area: Primary:1.55QMM

Secondary:1.55QMM

Secondary:1.55QMM Regulation.

-Protection: against Overheating and short circuits, against mains voltage spikes, against overloads


-Suitable for the supply of power LED and LED modules.

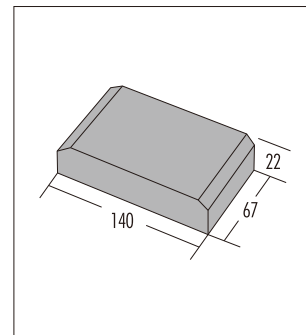

EN 61347-2-13 EN 61347-1 EN 55015 EN 61000-3-2 DIN VD E0710-T14 EN 61547 EN 60598-1




LED Driver

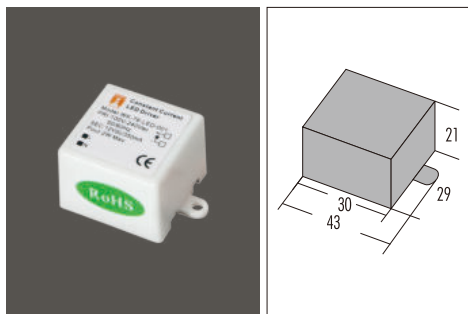


WK-76-LED-001A

Watt 1x1W
Input Voltage 100V-240Vac
Input Frequency 50Hz / 60Hz
Output Voltage 3-5Vdc
Output Power 1W
Output Current 350mA±6%

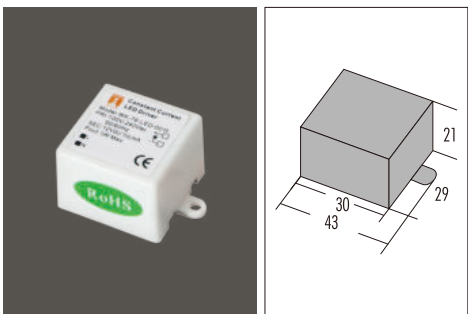


WK-76-LED-001B

Watt 1x3W
Input Voltage 100V-240Vac
Input Frequency 50Hz / 60Hz
Output Voltage 3-5Vdc
Output Power 3W
Output Current 700mA±6%

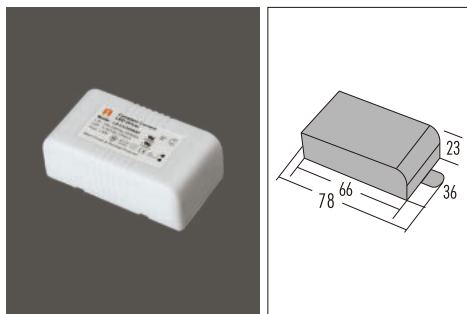


WK-76-LED-005

Watt 3~8x1W
Input Voltage 100V-240Vac
Input Frequency 50Hz / 60Hz
Output Voltage 6-36Vdc
Output Power 3-8W
Output Current 350mA±6%

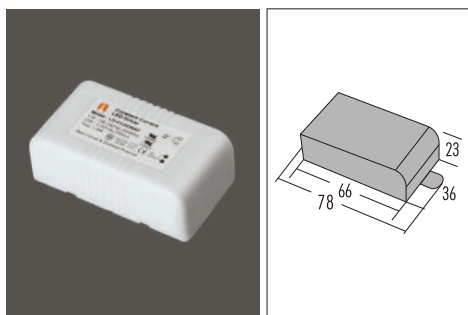


WK-76-LED-006A

Watt 3x3W
Input Voltage 100V-240Vac
Input Frequency 50Hz / 60Hz
Output Voltage 3-21Vdc
Output Power 3-9W
Output Current 700mA±6%

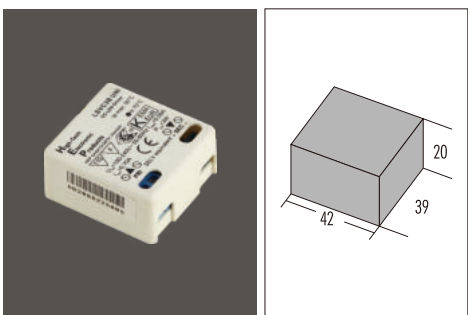


HEP-LSVC3A UNI

Watt 3x1W
Input Voltage 100V-240Vac
Input Frequency 50Hz / 60Hz
Output Voltage 3-10Vdc
Output Power 1-3W
Output Current 350mA±6%

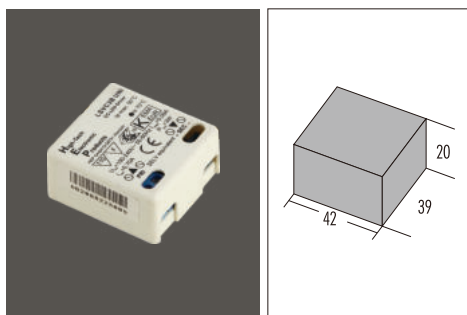


HEP-LSVC3B UNI

Watt 1x3W
Input Voltage 100V-240Vac
Input Frequency 50Hz / 60Hz
Output Voltage 3-10Vdc
Output Power 3W
Output Current 700mA±6%

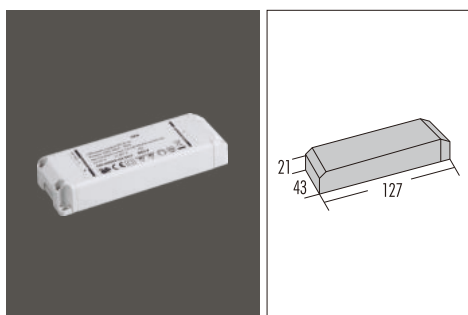


WK-76-LED-A1008

Watt 12x1W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 50Vdc
Output Power 12W
Output Current 350mA±6%

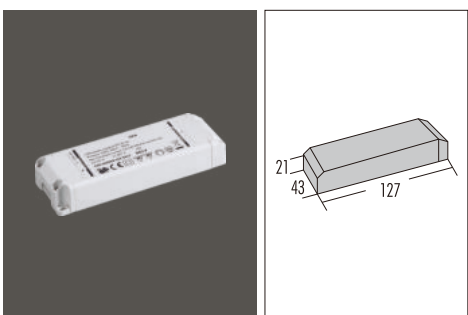


WK-76-LED-A1009

Watt 15x1W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 60Vdc
Output Power 15W
Output Current 350mA±6%

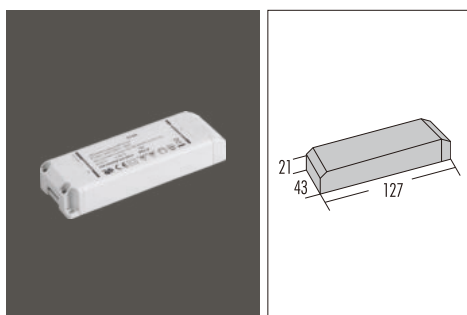


WK-76-LED-A1010

Watt 18x1W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 70Vdc
Output Power 18W
Output Current 350mA±6%

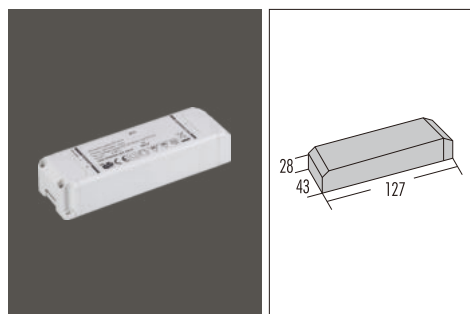


WK-76-LED-A1011

Watt 30x1W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 115Vdc
Output Power 30W
Output Current 350mA±6%

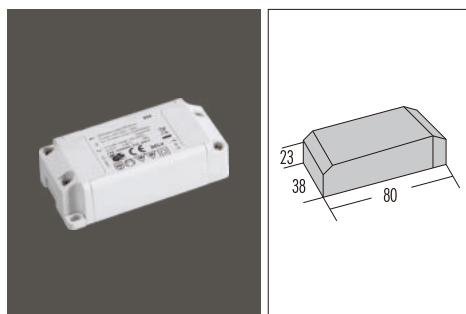


WK-76-LED-A1034

Watt 5x2W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 18Vdc
Output Power 10W
Output Current 500mA±6%

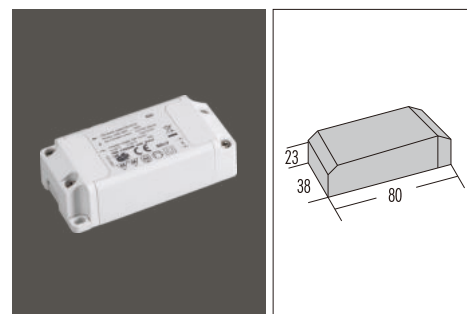


WK-76-LED-A1035

Watt 4x2.5W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 15Vdc
Output Power 10W
Output Current 600mA±6%

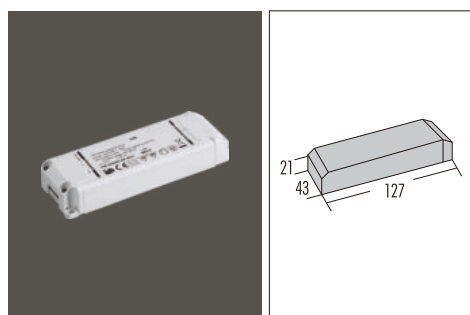


WK-76-LED-A1037

Watt 8x2W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 33Vdc
Output Power 16W
Output Current 500mA±6%

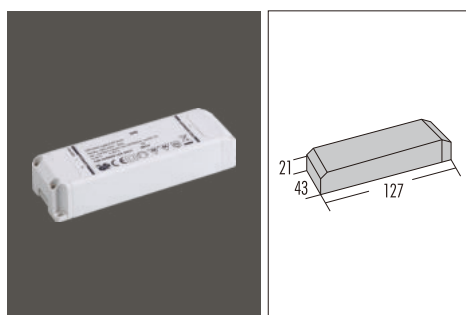


WK-76-LED-A1038

Watt 7x2.5W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 28Vdc
Output Power 17.5W
Output Current 600mA±6%

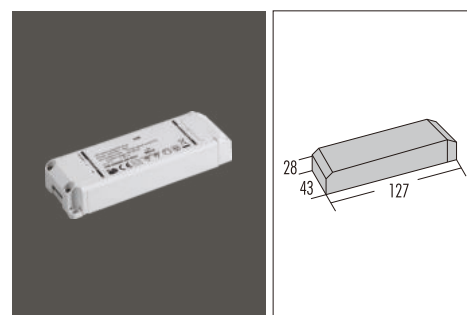


WK-76-LED-A1039

Watt 15x2W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 55Vdc
Output Power 30W
Output Current 500mA±6%

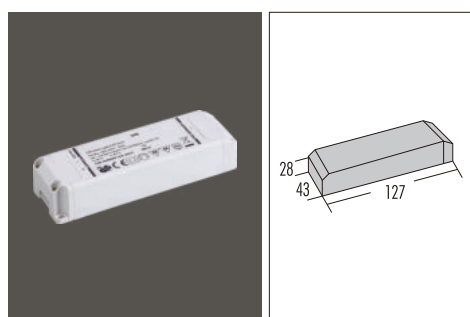

WK-76-LED-A1040

Watt 12x2.5W
Input Voltage 220V-240Vac
Input Frequency 50Hz
Output Voltage 48Vdc
Output Power 30W
Output Current 600mA±6%

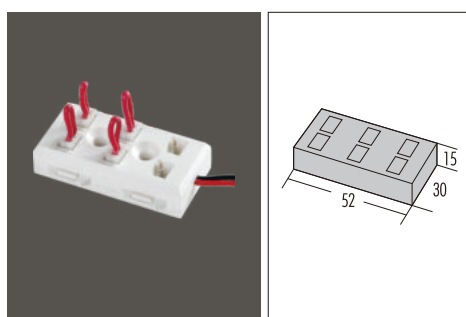

Connector

1-6 connector

TABLE OF CONTENTS

Model no.	Page	Model no.	Page
WK-FORTIMO-D4118 Twistable	01	WK-71-10-4118-D4	16
WK-LEDISK-D4118	01	WK-71-10-4118-D5	16
WK-FORTIMO-D366 Twistable	01	WK-71-10-4118-D6	16
WK-FORTIMO-D366 SLM	01	WK-71-10-4118-D8	16
WK-LEDISK-D366	01	WK-71-10-4119-D6	16
WK-Fortimo-Chester-H6 Twistable	02	WK-71-10-11-D4	17
WK-Fortimo-Chester-H6 DLM-i	02	WK-71-10-11-D5	17
WK-Fortimo-Chester-H6 DLM/TDLM	02	WK-71-10-11-D6	17
WK-Fortimo-Chester-H6 SLM	02	WK-71-10-11-D8	17
WK-Fortimo-Chester-H6 Lexel	02	WK-LP0606CW	18
WK-Fortimo-Chester-H8 Twistable	03	WK-LP0312CW	18
WK-Fortimo-Chester-H8-DLM-i	03	WK-71-64-967-3528	19
WK-Fortimo-Chester-H8-DLM/TDLM	03	WK-71-64-967-5050	20
WK-Fortimo-Chester-H8-SLM	03	WK-71-64-968-3528	21
WK-Fortimo-Chester-H8-Lexel	03	WK-71-64-968-5050	22
Fortimo LED Line 3R Lv1	04	WK-71-64-967-5050-RGB	23
Fortimo LED Line 1R Lv1	04	WK-71-64-96-AP	24
WK-PrevaLED-Chester-H6	05	WK-71-64-96-PCR-Matt	24
WK-PrevaLED-Chester-H6 DALI	05	WK-71-64-96-PC-F-Matt	24
WK-PrevaLED-Chester-H8	05	WK-71-64-96-PC-F-Clear	24
WK-PrevaLED-Chester-H8 DALI	05	WK-71-64-96-PCR-Clear	24
WK-71-83-LP20-OSRAM	05	WK-76-NES-50-12	24
WK-PrevaLED-D366	06	WK-76-NES-50-24	24
WK-PrevaLED-D366 DALI	06	WK-76-NES-100-12	25
WK-71-83-D4118-18	06	WK-76-NES-100-24	25
WK-71-83-D366-18	06	WK-76-NES-150-12	25
WK-71-84-262-H6	06	WK-76-NES-150-24	25
WK-71-83-828	07	WK-76-NES-350-12	25
WK-71-83-8088	07	WK-76-NES-350-24	25
WK-71-83-8086	07	WK-76-HEP 1-10v	25
WK-71-83-8075	07	WK-71-64-702-0-6	26
WK-71-83-8077	07	WK-71-64-702-0-12	26
WK-71-83-5018	08	WK-71-64-702-1-6	26
WK-71-83-5019	08	WK-71-64-702-1-12	26
WK-71-61-AL19	08	WK-71-64-801-600	26
WK-71-61-AL20	08	WK-71-64-801-300	26
WK-71-61-AL21	08	WK-71-64-893	26
WK-71-83-818	09	WK-71-64-703-4	27
WK-71-83-878D	09	WK-71-64-703-9	27
WK-71-83-818PC	09	WK-71-64-703-24	27
WK-71-83-878PC	09	WK-71-64-703-48	27
WK-71-83-819D	10	WK-71-42-4450	28
WK-71-83-879D	10	WK-71-42-4828	28
WK-71-83-819	10	WK-71-42-4050	28
WK-71-83-824	10	WK-71-85-4051E	28
WK-71-83-824-H38	10	WK-71-42-4052	28
WK-71-83-831	11	WK-71-42-1301	29
WK-71-83-831-H	11	WK-71-42-4313	29
WK-71-83-831D	11	WK-71-42-4316	29
WK-71-83-831D-H	11	WK-71-42-1201-HP	29
WK-71-83-850	12	WK-71-42-1202-HP	29
WK-71-83-870	12	WK-71-42-4111	30
WK-71-83-872	12	WK-71-42-4112	30
WK-71-83-843	12	WK-71-42-4113	30
WK-71-81-240S	12	WK-71-42-4114	30
WK-71-81-1070-1H	13	WK-71-42-4115	30
WK-71-81-1070-2H	13	WK-71-42-2201	31
WK-71-81-1070-3H	13	WK-71-42-2202	31
WK-71-81-1070-4H	13	WK-71-42-2203	31
WK-71-83-826	14	WK-71-42-2204	31
WK-71-81-817-1H	14	WK-71-90-9007	31
WK-71-81-817-2H	14	WK-71-42-7011A	32
WK-71-81-817-3H	14	WK-71-42-7011B	32
WK-71-10-12-D-4	15	WK-71-42-WL30	32
WK-71-10-12-D-6	15	WK-71-42-WL48	32
WK-71-10-12-D-8	15	WK-71-42-HBL120	32

TABLE OF CONTENTS

Model no.	Page	Model no.	Page
WK-71-42-HBL250	32	WK-71-85-4026	46
WK-71-42-5016	33	WK-71-85-311-1 (One Way)	46
WK-71-42-5017	33	WK-71-85-312-1 (One Way)	46
WK-71-42-7148	33	WK-71-85-313-1 (One Way)	46
WK-71-42-7144	33	WK-71-85-311-2 (Two Way)	47
WK-71-42-7146	33	WK-71-85-312-2 (Two Way)	47
WK-71-42-7188	33	WK-71-85-313-2 (Two Way)	47
WK-71-42-7181	33	WK-71-63-712A	48
WK-71-42-7186	33	WK-71-63-712B	48
WK-71-42-9003-12	34	WK-71-63-712BF	48
WK-71-42-9003-24	34	WK-71-63-712C	48
WK-71-42-9005-14	34	WK-71-63-712D	48
WK-71-42-9005-28	34	WK-71-63-712F	48
WK-71-42-9006-36	35	WK-71-63-714A	49
WK-71-42-9007-36	35	WK-71-63-714B	49
D-PRO-48-350mA-DMX	35	WK-71-63-714BF	49
D-PRO-24-350mA-DMX	35	WK-71-63-714C	49
WK-71-87-221	36	WK-71-63-714D	49
WK-71-87-611	36	WK-71-63-714F	49
WK-71-87-613	36	WK-71-63-718A	50
WK-71-66-6018	36	WK-71-63-718B	50
WK-71-89-9360-DLMI	36	WK-71-63-718BF	50
WK-71-89-6003-DLMI	36	WK-71-63-718C	50
WK-71-89-1049	37	WK-71-63-718D	50
WK-71-89-1049H	37	WK-71-63-718F	50
WK-71-89-95201S	37	WK-71-63-719A	51
WK-71-89-952301	37	WK-71-63-719B	51
WK-71-89-952381	37	WK-71-63-719BF	51
WK-71-62-901	38	WK-71-63-719C	51
WK-71-62-902S	38	WK-71-63-719D	51
WK-71-62-921	38	WK-71-63-719F	51
WK-71-62-999	38	WK-71-63-715R	52
WK-71-62-811	39	WK-71-63-718BR	52
WK-71-62-812	39	WK-71-63-711B-H10	52
WK-71-62-813	39	WK-71-TD-01-7	53
WK-71-62-814	39	WK-71-TD-01-10	53
WK-71-62-820S	39	WK-71-TD-01-14/18	53
WK-71-62-838	40	WK-71-TL-01-7-dim	53
WK-71-62-839	40	WK-71-TL-02-6	53
WK-71-62-840	40	TN01-Maxi	54
WK-71-85-9001	41	WK-76-LED-001A	55
WK-71-85-9002	41	WK-76-LED-001B	55
WK-71-85-7001	41	WK-76-LED-005	55
WK-71-85-7002	41	WK-76-LED-006A	55
WK-71-85-8001	41	HEP-LSVC3A UNI	55
WK-71-85-8002	42	HEP-LSVC3B UNI	55
WK-71-85-6001	42	WK-76-LED-A1008	55
WK-71-85-6002	42	WK-76-LED-A1009	55
WK-71-85-5001	42	WK-76-LED-A1010	55
WK-71-85-5002	42	WK-76-LED-A1011	56
WK-71-85-5201	43	WK-76-LED-A1034	56
WK-71-85-5046	43	WK-76-LED-A1035	56
WK-71-85-3001-HP-LED	43	WK-76-LED-A1037	56
WK-71-85-3002-HP-LED	43	WK-76-LED-A1038	56
WK-71-85-3003-HP-LED	43	WK-76-LED-A1039	56
WK-71-85-3004-HP-LED	44	WK-76-LED-A1040	56
WK-71-85-3005-HP-LED	44	Connector	56
WK-71-85-3006-HP-LED	44		
WK-71-85-3001-9-LED	44		
WK-71-85-3001-H-9-LED	44		
WK-71-85-3001-4-LED	45		
WK-71-85-3002-4-LED	45		
WK-71-85-3003-4-LED	45		
WK-71-85-4023	45		
WK-71-85-4024	45		
WK-71-85-4025	46		