



LD Lighting

GL-Garden Light S.A.







Icons

- | | | | |
|--|--|--|--|
| | Class I protection, requires an earth connection | | Energy-efficient light source or light bulb |
| | Class III protection, light fixture is supplied from extra-low voltage | | Ingress protection degree IP xy: (x) against solid bodies; (y) against liquids |
| | Spike | | No incandescent light bulb |
| | Mounting base | | Adjustable |
| | Mounting stem | | Brass cable grommet |
| | Mounting pot | | LED Power Supply |
| | Mounting box | | Socket |
| | Included | | Light up |
| | Not included | | Light sideways |
| | GU10 LED light bulb | | Light down |
| | MR16 GU5.3 LED light bulb | | Light up and down |
| | PAR20 E27 LED light bulb | | Light down and sideways |
| | E27 LED light bulb | | Light up for recessed uplights |
| | G4 (GY6.35) LED light bulb | | Light up and sideways for recessed uplights |
| | SMD LED (surface mount light-emitting diodes) | | |



Established in 2007,
LD-Lighting is an outdoor
lighting brand.
We are committed to
the highest quality lighting,
innovation and energy efficiency

QUALITY AND GUARANTEE

Our fixtures are designed specifically for outdoor use but can also be used indoors.

We provide a lifetime guarantee on all our die-cast brass casing. It is crucial for outdoor lights to endure any aggressive environment. Bronze plating protects fixtures from corrosion and rust.

Our lights are suitable for any climate and work in a temperature range from -30C to +60C. They perfectly withstand extreme weather conditions - wind, rain, snow, sandstorms and salty sea air.

Ingress protection varies from IP44 to IP68 depending on the type of light. Every light we manufacture is hand inspected at the factory.

SAVING YOUR MONEY

Our lifetime guarantee on brass casing means that you buy the lights for life. You do not have to constantly replace them.

SAFETY

All of our 220/240V lights are equipped with a 2 core and earth green & yellow cable protecting people from electrical shock. These lights must be connected only to the lighting circuits with earth.



Enhance the beauty of
your garden at night with
LD-Lighting

VARIETY

We cover the full range of outdoor lighting demands for residential and commercial properties:

- path lighting
- façade lighting
- step and deck lighting
- landscape lighting
- pond and fountain lighting

DESIGN

We pay special attention to design. Our lights blend harmoniously into any landscape and architecture during the day. At night they transform the surroundings into an enchanting place, creating comfortable and cosy atmosphere.

Our team constantly works on invention of new shapes combining them with new lighting technologies. Since 2016 we started to expand our product line to include interior lighting solutions.

ECOLOGY

Eco-efficiency is a matter of great concern to us. We do our best to use recycled materials and minimize waste and pollution.

We use only eco-friendly LED light sources and our fixtures. LEDs have a very low power consumption and a long lifespan.



CONTENT

OUTDOOR

Surface & Spike Mount Spotlights	3
Wall Lights	11
Step and Deck Lights	21
Recessed Uplights	29
Bollard Lights	35
Classic Collection	47
Underwater Lights	51
Garden Sockets	55

Accessories

Mounting Base	59
Stem	59

Surface & Spike Mount Spotlights

Optimal shape design and colour
makes these spotlights
most versatile.

They are perfect for garden lighting,
façade lighting and indoor use.



LD-C027



Surface & Spike Spotlight


For illuminating landscape features and architectural details

Material: die-cast brass,
clear glass

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x GU10 max 15W

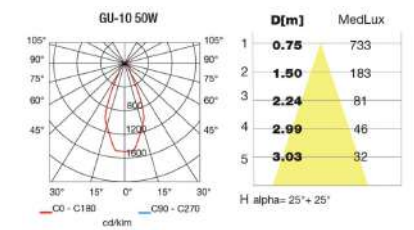

Length: 7.48"/190mm

Width: 2.44"/62mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield

LD-C024

Surface & Spike Spotlight


For highlighting plants, trees and for façade lighting

Material: die-cast brass,
clear glass

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x GU10 max 15W

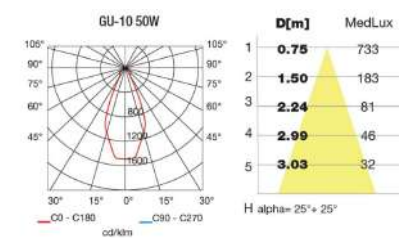

Length: 7.28"/185mm

Width: 2.36"/60mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield



LD-C029

Surface & Spike Spotlight


For outdoor and indoor spot lighting

Material: die-cast brass,
clear glass

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x GU10 max 15W

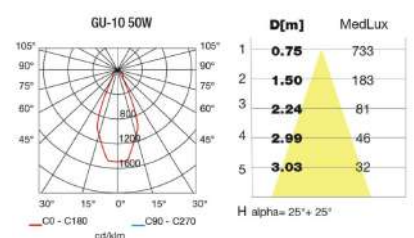

Length: 7.68"/195mm

Width: 2.44"/62mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield




LD-C026



Surface & Spike Spotlight



For directional illumination of landscape features and architectural details

Material: die-cast brass,
clear glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x GU10 max 15W

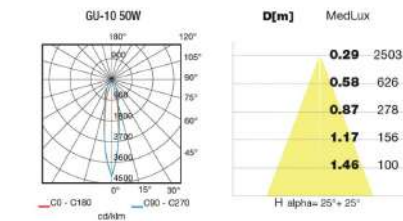

Length: 9.84~/250mm
Width: 2.17~/55mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield

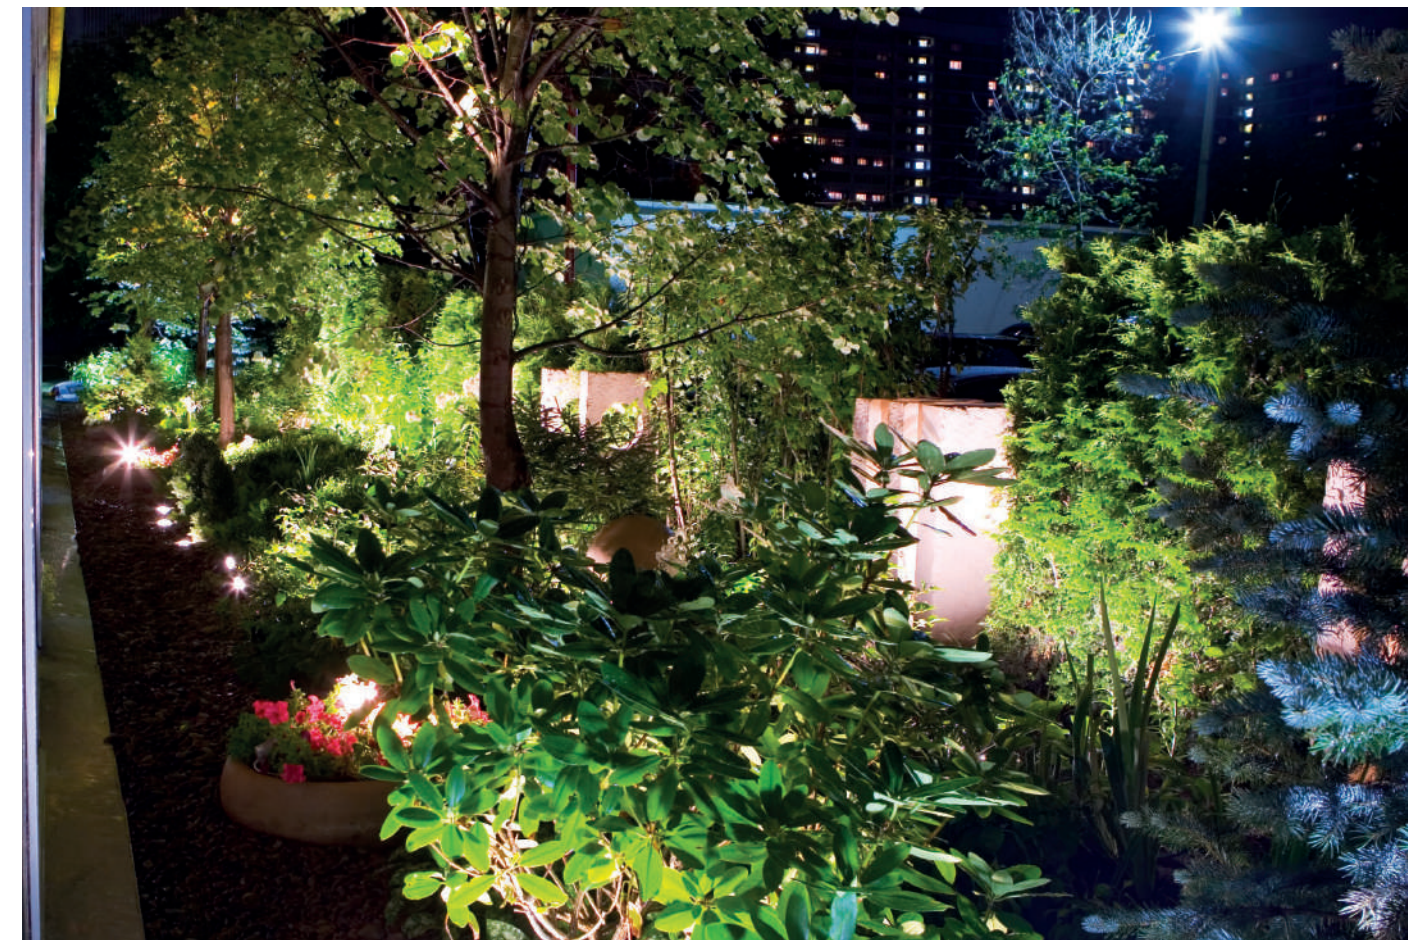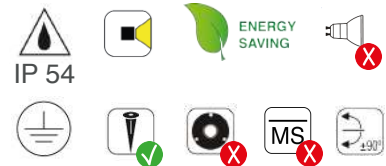


LD-C049



Surface & Spike Spotlight


For outdoor and indoor accent lighting. Equipped with adjustable glare shield that can slide up and down to control beam angle

Material: die-cast brass,
clear glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x GU10 max 15W

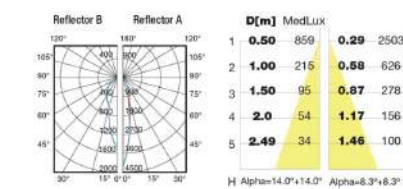

Length min: 6.69~/170mm
Length max: 9.45~/240mm
Width: 2.56~/65mm

Construction: adjustable lamp head with a locking knuckle joint

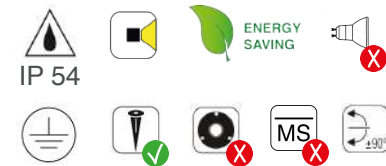


LD-C036



Surface & Spike Spotlight

For illuminating trees, plants, statues and façade

Material: die-cast brass,
clear glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x GU10 max 15W

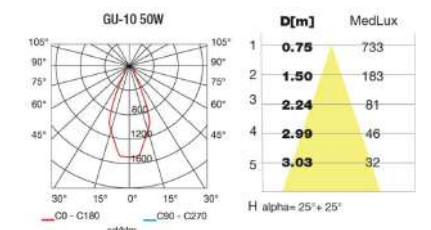


Length: 8.27~/210mm
Width: 2.6~/66mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield






LD-C048 LED

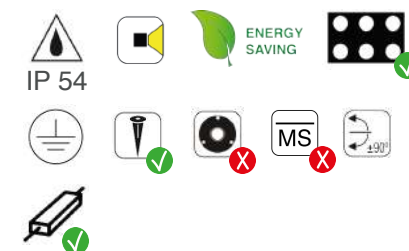

Surface & Spike Spotlight

For highlighting large plants, trees and for facade lighting


Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Light source: SMD LED 10-20W
800Lm, 3000K
Beam angle: 120 degrees

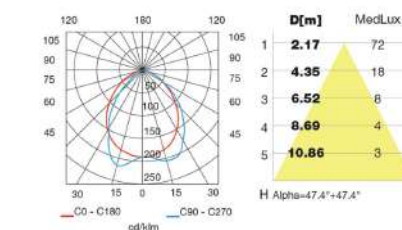

Width: rectangle 5.12"/130mm
x 3.54"/90mm
Height: 5.51"/140mm
Depth: 5.2"/132mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield. Spare and prismatic glass included.


LD-C045 LED

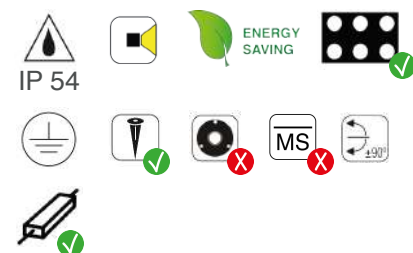

Surface & Spike Spotlight

For highlighting plants, trees, and for facade lighting. Ideal for downlighting rock gardens when used with mounting stem.

Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Light source: SMD LED 10W
600Lm, 3000K-6000K
Beam angle: 120 degrees

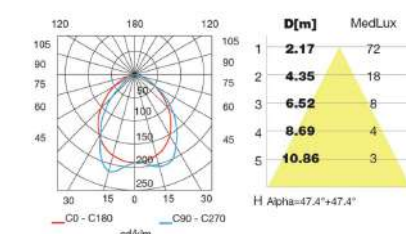

Width: ellipse 5.9"/150mm x
4.72"/120mm
Height: 6.3"/160mm
Depth: 6.1"/155mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield. Spare and prismatic glass included.


LD-C030 LED



Surface & Spike Spotlight

For illuminating big trees and for facade lighting

Material: die-cast brass,
clear glass
Finish: old bronze
Voltage: 220/240V
Light source: SMD LED 12W
1200Lm, 3000K
Beam angle: 60 degrees

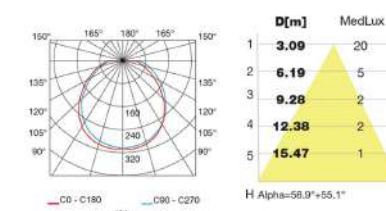

Width: 4.33"/110mm
Height: 5.51"/140mm
Depth: 4.53"/115mm

Construction: adjustable lamp head with a locking knuckle joint and a glare shield



Wall Lights

Impeccably designed, these wall lights blend with any surface texture and harmoniously fit into any architecture

LD-C035



Up and Down Wall Light

For façade lighting. The light creates two identical beams directed up and down producing a beautiful grazing effect


Material: die-cast brass,

clear glass

Finish: old bronze

Voltage: 220/240V

Lamp type: 2 x GU10 max 15W

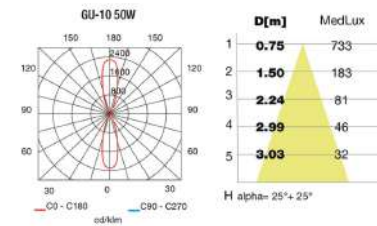

Lamp head diameter:

2.36"/60mm

Height: 7.09"/180mm

Depth: 4.33"/110mm

Construction: the lamp head is fixed on a mounting base



LD-C034



Up or Down Wall Light

For façade lighting. The light can be directed upwards or downwards to create an interesting grazing effect


Material: die-cast brass,

clear glass

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x GU10 max 15W

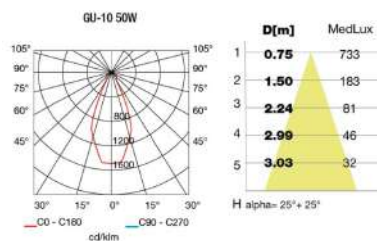

Lamp head diameter:

2.36"/60mm

Height: 5.12"/130mm

Depth: 3.15"/80mm

Construction: the lamp head is fixed on a mounting base





LD-P001

Ceiling Light

Round bulkhead lamp with ring, eyelid or guard cover. Made of die-cast brass material, rust and corrosion-free. Suitable for ceiling, wall and post installation lighting.



Material: die-cast brass,
PMMA diffuser
Finish: old bronze
Voltage: 220V

Light source: SMD LED 24W
72pcs LEDs
Color temperature:
3000K - 36pcs - 12W
4200K - 72pcs - 24W
6000K - 36pcs - 12W
Beam angle: 120° degrees



Diameter: 11.8"/ 300mm
Height: 3.5"/ 90mm

Construction: the lamp is fixed on a flat surface.


LD-JB007

Up and Down Wall Light

For façade lighting. The light can be directed upwards or downwards to create an interesting grazing effect



Material: die-cast brass,
Finish: old bronze
Voltage: 220V
Lamp type: 1 x G9 max 10W

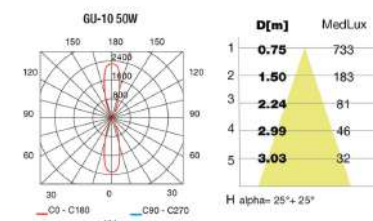

Width: 3.5"/ 90mm
Height: 11.4"/ 290mm
Depth: top 7.7"/ 198mm /
bottom 4.3"/ 110mm

Construction: lamp is fixed on a mounting base





LD-D009

Wall and Step Eyelid Light

For retaining wall, step, deck and patio lighting. Because of its small size and old bronze colour, this model blends in with any surface texture – timber, stone or brick. Delicately spreading the light downwards, this model creates a cosy atmosphere



Material: die-cast brass,
frosted glass


Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x G4 (GY6.35)

max 5W

Diameter: 3.82"/97mm

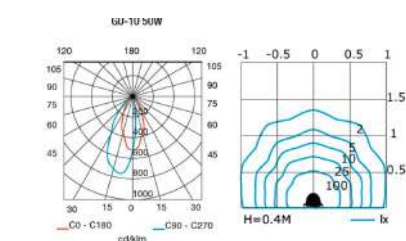

Installation: surface mount

LD-D010

Wall and Step Light with Grill

For retaining wall, step, deck and patio lighting. Because of its small size and old bronze colour, this model blends in with any surface texture – timber, stone or brick. Grill protects glass diffuser from an accidental impact



Material: die-cast brass ,
frosted glass


Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x G4 (GY6.35)

max 5W

Diameter: 3.82"/97mm

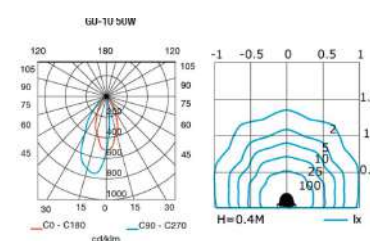

Installation: surface mount



MP-46



Wall light

Stylish design resembles a real torch. It evokes a return to times when things were authentic and environment was natural. Perfect for both decorative and functional lighting of facades, walls and stone fences


Material: die-cast aluminium, frosted glass

Voltage: 220/240V

Lamp type: 1 x E27 max 30W

Height: 24.8"/630mm

Projection: 9.84"/250mm

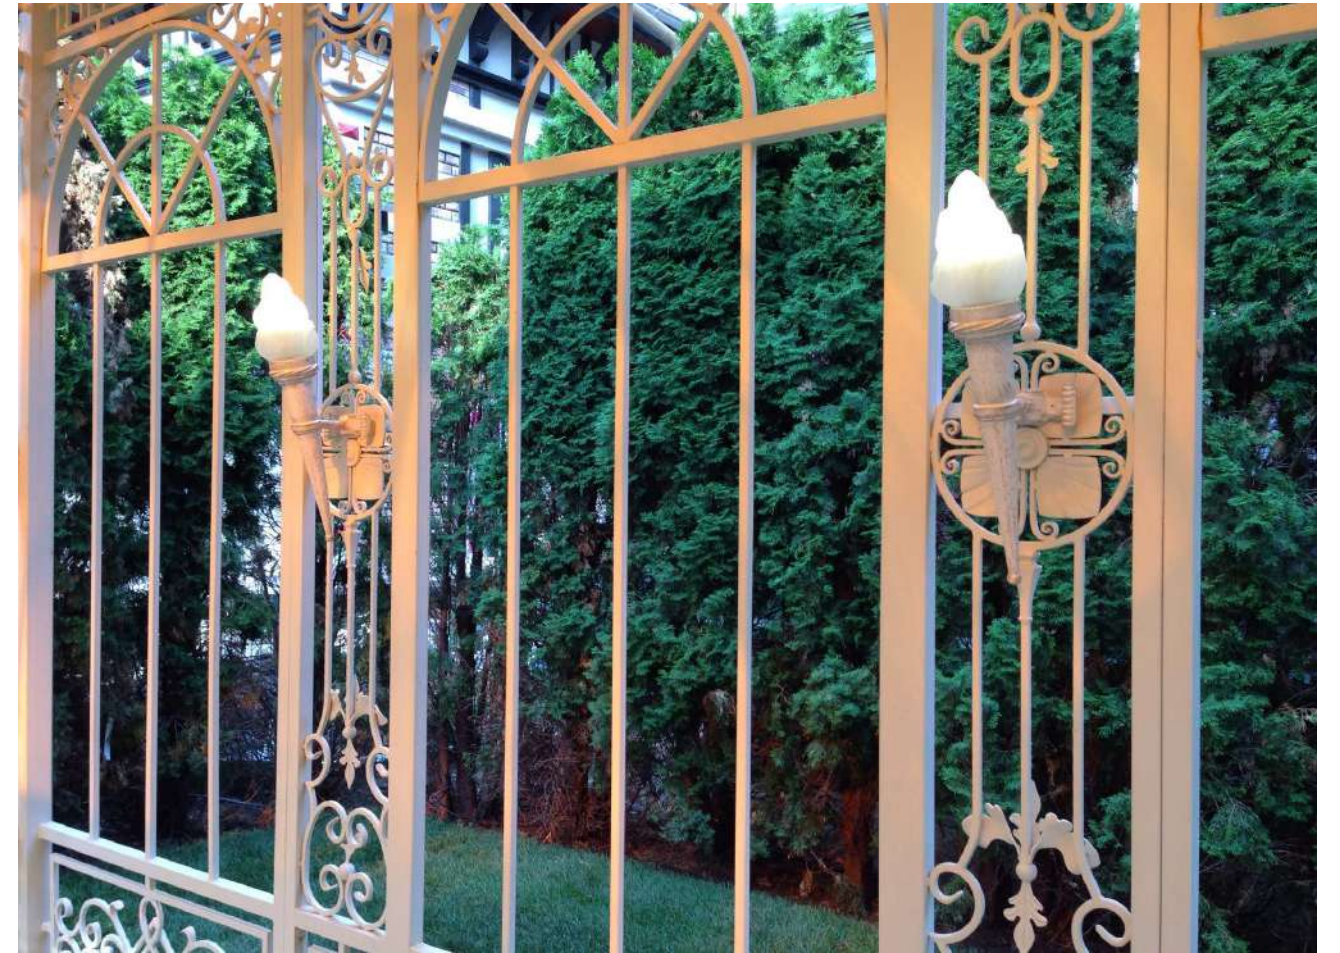

MP-48



Wall light

Material: die-cast aluminium, frosted glass

Voltage: 220/240V

Lamp type: 2 x E27 max 30W


Height: 24.8"/630mm

Projection: 9.84"/250mm




Finish

Black

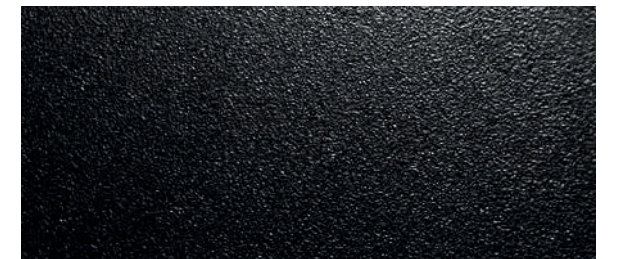

Gold Patina

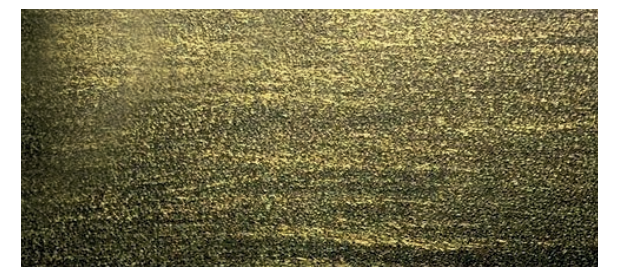

Silver Patina





Step & Deck Lights

Perfectly proportioned light adds
beauty to the environment and
ensures safe walking




LD-D007



Recessed Guide Eyelid Light

For retaining wall, step, deck and patio lighting. This model is fitted with the eyelid hiding the light source from above when walking past

Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x G4 (GY6.35)
max 5W

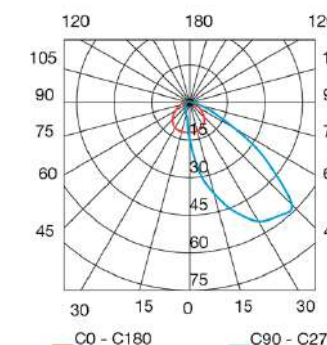

Width: 4.45"/113mm
Height: 2.48"/63mm
Depth: 5.12"/130mm

Cutting hole
Width: 3.35"/85mm
Height: 2.36"/60mm
Depth: 4.72"/120mm


LD-D006

Recessed Guide Light

For retaining wall, step, deck and patio lighting. Frosted glass diffuser softly spreads the light



Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x G4 (GY6.35)
max 5W

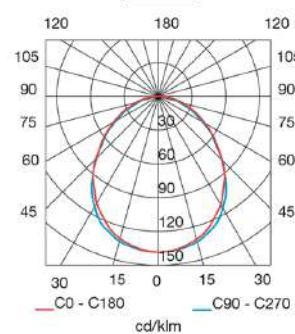

Width: 4.45"/113mm
Height: 2.48"/63mm
Depth: 4.53"/115mm

Cutting hole
Width: 3.35"/85mm
Height: 2.36"/60mm
Depth: 4.72"/120mm


LD-D008

Recessed Guide Light with Grill

For retaining wall, step and deck lighting. Horizontal grill hides the light source from above when walking past and protects glass diffuser from an accidental impact



Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x G4 (GY6.35)
max 5W

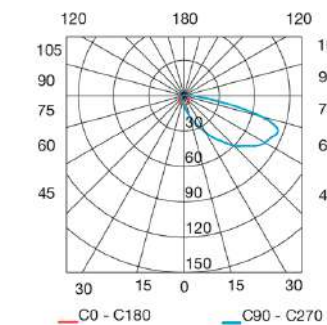

Width: 4.45"/113mm
Height: 2.48"/63mm
Depth: 4.53"/115mm

Cutting hole
Width: 3.35"/85mm
Height: 2.36"/60mm
Depth: 4.72"/120mm



LD-D016A LED



Recessed Guide Light

For retaining wall, step, deck and patio lighting. Frosted glass dif-fuser softly spreads the light

Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Light source: SMD LED 3W,
3000K

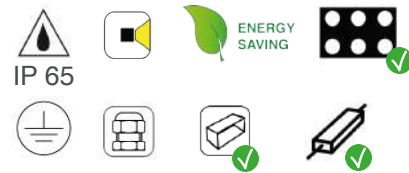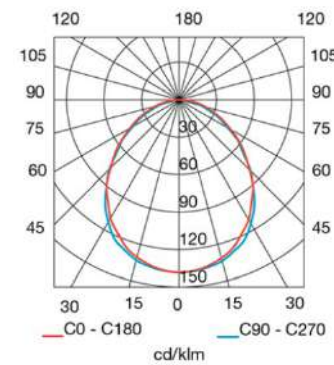


Width: 8.62"/219mm
Height: 2.95"/75mm
Depth: 3.94"/100mm

Cutting hole

Width: 8.86"/225mm
Height: 2.95"/75mm
Depth: 4.13"/105mm




LD-D016B LED

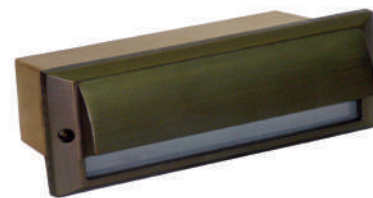

Recessed Guide Eyelid Light

For retaining wall, step, deck and patio lighting. This model is fitted with the eyelid hiding the light source from above when walking past

Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Light source: SMD LED 3W,
3000K

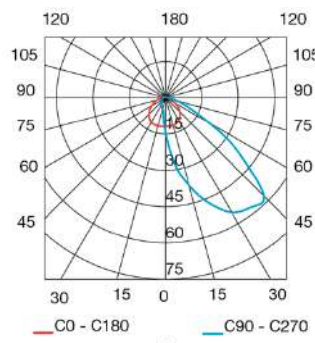

Width: 8.62"/219mm
Height: 2.95"/75mm
Depth: 4.53"/115mm

Cutting hole

Width: 8.86"/225mm
Height: 2.95"/75mm
Depth: 4.13"/105mm


LD-D016C LED



Recessed Guide Light with Grill

For retaining wall, step and deck lighting. Horizontal grill hides the light source from above when walking past and protects glass dif-fuser from an accidental impact

Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Light source: SMD LED 3W,
3000K

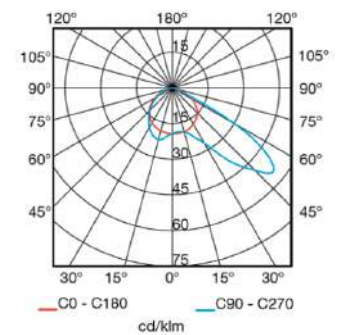

Width: 8.62"/219mm
Height: 2.95"/75mm
Depth: 3.94"/100mm

Cutting hole


Width: 8.86"/225mm
Height: 2.95"/75mm
Depth: 4.13"/105mm



LD-D017 LED

Recessed Guide Light

For retaining wall, step, deck and patio lighting.
Frosted glass diffuser softly spreads the light

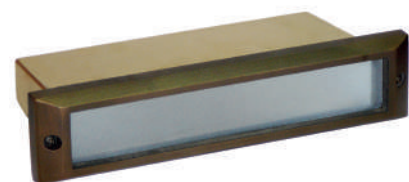


Material: die-cast brass,
frosted glass

Finish: old bronze

Voltage: 220/240V

Light source: SMD LED 3W,
3000K



Width: 8.62"/219mm

Height: 1.97"/50mm

Depth: 4.53"/115mm

Cutting hole

Width: 7.68"/195mm

Height: 1.38"/35mm


Depth: 4.72"/120mm



LD-D019 LED

Recessed Guide Light with Grill

For retaining wall, step and deck lighting. Horizontal grill hides the light source from above when walking past and protects glass diffuser from an accidental impact

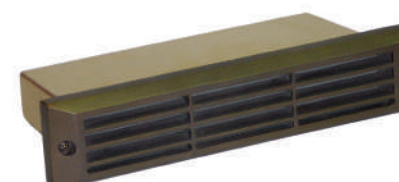


Material: die-cast brass,
frosted glass

Finish: old bronze

Voltage: 220/240V

Light source: SMD LED 3W,
3000K

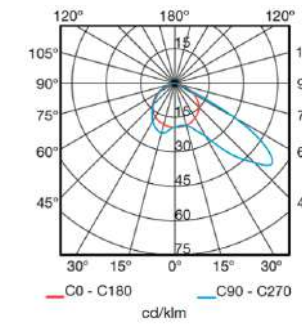

Width: 8.62"/219mm

Height: 1.97"/50mm

Depth: 4.53"/115mm

Cutting hole

Width: 7.68"/195mm

Height: 1.38"/35mm

Depth: 4.72"/120mm





Recessed Lights

Uplights are about both functionality and dramatic lighting effects, perfect for areas where spike lights or wall lights cannot be used


LD-W118

Recessed Uplight with Grill

For façade, retaining wall and deck lighting, for highlighting plants and marking drive sides. The grill protects glass diffuser from impact and can withstand 4420Lbs/2000KG of pressure



Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x GU10 max 15W

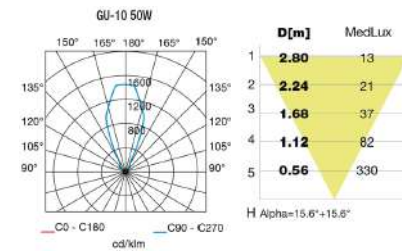

Height: 5.9"/150mm
Upper diameter: 4.72"/120mm
Lower diameter: 2.95"/75mm

Mounting pot
Height: 5.31"/135mm
Upper diameter: 4.72"/120mm
Lower diameter: 3.15"/80mm




LD-W119A

Recessed Uplight

For façade, retaining wall and deck lighting, for highlighting plants. Ideal solution for flat areas where spike mount lights would be a trip hazard or a hindrance to mowing a lawn



Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x GU10 max 15W

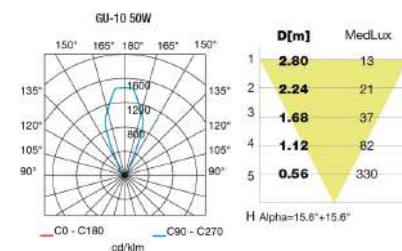

Height: 5.2"/132mm
Upper diameter: 4.72"/120mm
Lower diameter: 2.95"/75mm

Mounting pot
Height: 5.31"/135mm
Upper diameter: 4.72"/120mm
Lower diameter: 3.15"/80mm




LD-W119

Recessed Uplight with Anti-glare Shield

For façade, retaining wall and deck lighting, for highlighting plants and green arches. Anti-glare shield masks a portion of the light beam



Material: die-cast brass,
frosted glass
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x GU10 max 15W

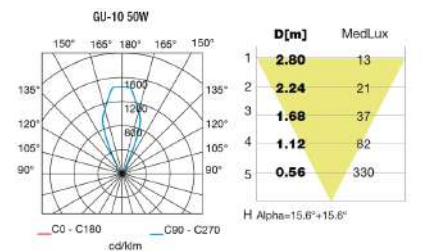

Height: 6.42"/163mm
Upper diameter: 4.72"/120mm
Lower diameter: 2.95"/75mm

Mounting pot
Height: 5.31"/135mm
Upper diameter: 4.72"/120mm
Lower diameter: 3.15"/80mm



LD-W114



Recessed light

Ideal solution for flat areas where spike mount lights would be a trip hazard or a hindrance to mowing a lawn


Material: die-cast brass,

clear glass

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x GU10 max 8W



Height: 3.74"/95mm

Upper diameter: 3.74"/95mm

Lower diameter: 2.56"/65mm

Mounting pot

Height: 5.1"/130mm

Upper diameter: 4.13"/105mm

Lower diameter: 2.76"/70mm



LD-W112



Recessed light

Ideal solution for flat areas where spike mount lights would be a trip hazard or a hindrance to mowing a lawn


Material: die-cast brass,

clear glass

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x GU10 max 8W



Height: 3.74"/95mm

Upper diameter: 3.74"/95mm

Lower diameter: 2.56"/65mm

Mounting pot

Height: 5.1"/130mm

Upper diameter: 4.13"/105mm

Lower diameter: 2.76"/70mm





Bollard Lights

Simplicity in shape comes together with the essence of light, making this series of bollard lights ideal for both modern and classic environments

LD-B6080

Bollard Light

For path and drive lighting. Simple design and old bronze colour harmoniously blend into any landscape.

This model creates soft reflected light. The optic system combines 3 elements:

- light source hidden in the body of the bollard
- reflector 100% brass, painted white
- clear polycarbonate diffuser lens

The reflector is placed above the light source and the lens to maximise light output.

The diffuser spreads the light evenly, without glare effect.




Material: die-cast brass,
clear polycarbonate diffuser
Finish: old bronze
Voltage: 220/240V
Lamp type: 1 x GU10 max 15W


Height: 31.5"/800mm
Upper diameter: 2.36"/60mm
Lower diameter: 4.72"/120mm



There is an option for this model with a 3D laser engraved image. It can be a logo, a photo or a family coat of arms, for example. In this case a clear glass diffuser is used; minimum order quantity is 30 pieces

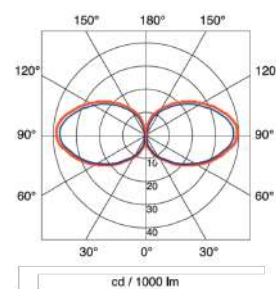

Fixing details:

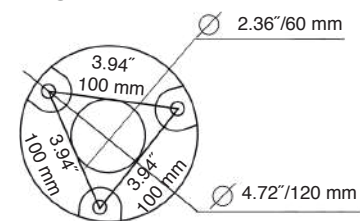

Wall light

LD-BP80

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W

Height: 11.22"/285mm

Diameter: 3.15"/80mm

Depth: 5.12"/130mm



Bollard Light with a Garden Socket

LD-BS8060

This light is equipped with an outdoor European power supply socket, a valuable accessory for equipment such as garden tools and appliances, pond lights, Christmas lights and mobile phones.

Power supply socket: IP 55, 220/240V, 50/60Hz, maximum power 2000W

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W




Height: 23.62"/600mm

Upper diameter: 3.15"/80mm

Lower diameter: 5.51"/140mm

Fixing details:

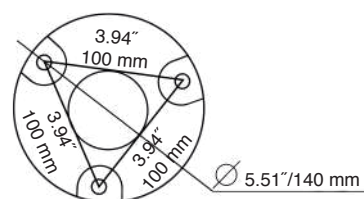

Bollard Lights

For path, drive, and lawn lighting.

Design shape and old bronze provide perfect integration between trees and plants.



LD-B8090

LD-B8075



Height:

29.53"/750mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm

Height:

35.43"/900mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W



Wall light

LD-BP81

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W

Height: 11.81"/300mm

Diameter: 3.15"/80mm

Depth: 5.12"/130mm



Bollard Light with a Garden Socket

This model is equipped with an outdoor European power supply socket.
An invaluable accessory for equipment such as garden tools and appliances,
pond lights, Christmas lights and mobile phones.

Power supply socket: IP 55, 220/240V, 50/60Hz, maximum power 2000W

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W




Height: 25.59"/650mm

Upper diameter: 3.15"/80mm

Lower diameter: 5.51"/140mm

Fixing details:

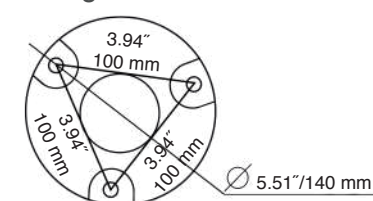

LD-BS855



Bollard Lights

For lighting paths, drive and lawn. Combination of stylish design and old bronze colour conforms with any architecture and landscape

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W



LD-B890



LD-B875



LD-B855



Height:

25.59"/650mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm

Height:

31.5"/800mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm

Height:

37.4"/950mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm



Wall light

LD-BP82

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W

Height: 13.19"/335mm

Diameter: 3.15"/80mm

Depth: 7.09"/180mm



Bollard Light with a Garden Socket

This model has a built-in outdoor European power supply socket, a valuable accessory for equipment such as garden tools and appliances, pond lights, Christmas lights and mobile phones.

Power supply socket: IP 55, 220/240V, 50/60Hz, maximum power 2000W

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W




Height: 25.59"/650mm

Upper diameter: 3.15"/80mm

Lower diameter: 5.51"/140mm

Fixing details:

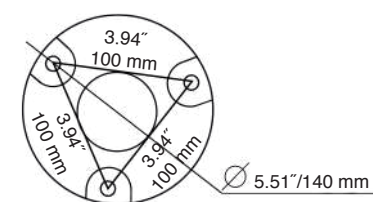

LD-BS860



Bollard Lights

For lighting paths, drive, flowerbeds, and lawn. Elegant design ideally compliments any architecture and garden. This series of lights goes with a reflecting cap (diameter: 9.84"/250mm). Painted outside in base colour and white inside, it softly spreads the light downwards

Material: die-cast brass,
opal polycarbonate diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 30W



LD-B891



LD-B880



LD-B860



Height:

25.59"/650mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm

Height:

31.5"/800mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm

Height:

37.4"/950mm

Upper diameter:

3.15"/80mm

Lower diameter:

5.51"/140mm

Classic Collection

Post Lights, Ceiling Lights

Classic post lights are designed to illuminate buildings, homestead, gardens and park areas



LD-FL001

Ceiling Light

For lighting terraces, patios and summer houses. Frosted diffuser provides soft light creating a cosy atmosphere

Material: die-cast brass head, steel chain, glass diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 100W

Height: 36,14"/ 918mm

Diameter head: 12,36"/ 314mm

Chain length: 16,6"/ 422mm

Mounting base

Height: 5,5"/ 140mm

Width: 5,5"/ 140mm

Depth: 3,14"/ 80mm



Wall Light

For façade lighting. This wall light is designed to compliment LD-FL001 ceiling light

Material: die-cast brass, glass diffuser

Finish: old bronze

Voltage: 220/240V

Lamp type: 1 x E27 max 100W

Height: 34,05"/ 865mm

Diameter head: 12,36"/ 314mm

Depth: 12,36"/ 418

Mounting base

Height: 5,5"/ 140mm

Width: 5,5"/ 140mm

Depth: 3,14"/ 80mm

LD-FL002



LD-FL003

Post light

For lighting parks, gardens and drive. Frosted glass diffuser provides a soft pool of light. Combination of classic design and old bronze colour conforms with any architecture and landscape

Material: die-cast brass head, aluminum post, glass diffuser

Finish: old bronze



Voltage: 220/240V

Lamp type: 1 x E27 max 100W

Height: 42.5"/1080mm

Base diameter: 8.07"/205mm

Diameter head: 12,36"/ 314mm

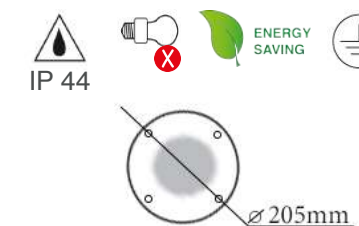

LD-FL004

Post light

For lighting parks, gardens and drive. Frosted glass diffuser provides a soft pool of light. Combination of classic design and old bronze colour conforms with any architecture and landscape

Material: die-cast brass head, aluminum post, glass diffuser

Finish: old bronze



Voltage: 220/240V

Lamp type: 1 x E27 max 100W

Height: 62.2"/1580mm

Base diameter: 8.07"/205mm

Diameter head: 12,36"/ 314mm

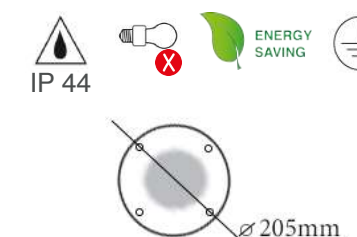




Post Lights

Material: die-cast brass head,
glass diffuser, aluminum post

Finish: old bronze

Voltage: 220/240V

Lamp type: E27 max 100W




LD-FL005




Height: 101.85"
/2587mm
Diameter head:
12.36"/314mm
Base diameter:
10.82"/275mm

LD-FL006

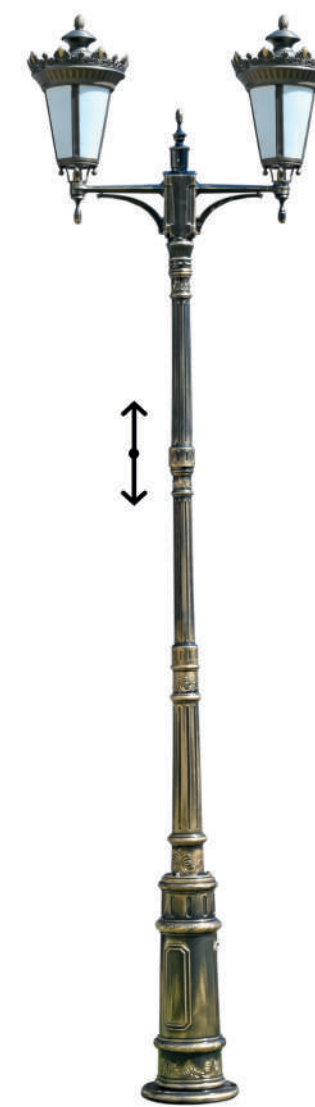

Height: from 103.03"/2617mm
to: 126.65"/3217mm
Diameter head: 12,36"/314mm
Lower diameter:
12.2"/310mm

LD-FL007

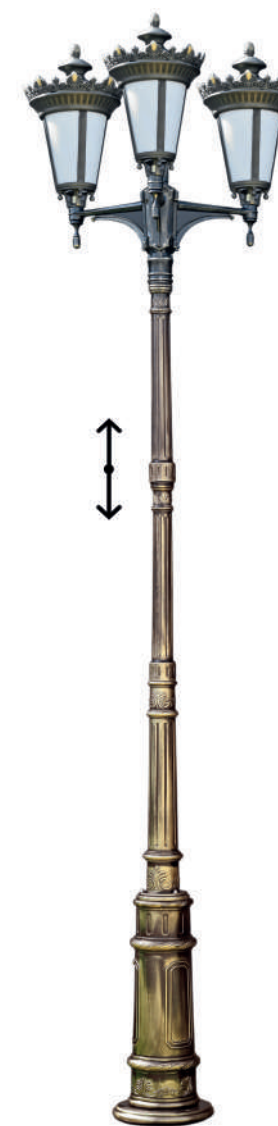

Height: from 103.03"/2617mm
to: 126.65"/3217mm
Diameter head: 12,36"/314mm
Lower diameter:
12.2"/310mm

Underwater Lights

Light and water make a dramatic synergy, creating spectacular effects and adding new dimension to water features

LD-U001


Underwater Light



For lighting fountains, waterfalls, cascades, and ponds. Animated water, whether spraying from waterjets or falling in cascades, is particularly beautiful when lit. Water is glistening in the shimmering light, creating a fascinating performance. Coloured effects are most dramatic if used sparingly. A fountain or a cascade lit with colour changing lights looks mesmerising

Material: die-cast brass, clear glass
Finish: old bronze
Voltage: 12V; requires power from LED power supply
Lamp type: 1 x GU5.3 max 15W

Height: 6.5"/165mm
Width: 4.06"/103mm
Diameter: 3.39"/86mm
Depth: 5.91"/150mm

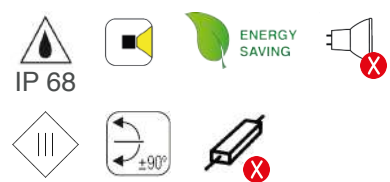

Installation: underwater or surface mount. Use in water gardens and ponds only.

Not for use in swimming pool or spa applications. This light is not to be installed within 10'/3.05m of a pool or spa.

This light comes equipped with 25'/7.62m of waterproof cable to facilitate installation away from water. Secondary cable is not to be buried more than 6"/152mm.

Connection or splicing of cable must be made above water line and at least 4'/1.22m from water edge



Garden Sockets

Garden is an important extension of home. Install supply sockets to feel conveniently outdoors

LD-GS020

Bollard with Two Garden Power Supply Sockets

This outdoor power supply socket is a valuable accessory for equipment such as garden tools and appliances, outdoor portable lights, pond lights, Christmas lights and mobile phones. Elegant and simple design and old bronze colour blend into any environment



Material: die-cast brass, plastic

Finish: old bronze

Voltage: 220/240V

Hertz: 50/60 Hz

Maximum power per outlet: 2000W

Height: 15.75"/400mm

Width: 7.87"/200mm


Upper diameter: 2.36"/60mm

Lower diameter: 4.72"/120mm

Construction: power supply weatherproof IP55 outdoor European socket with protected plug, earth contact, equipped with a 2 core and earth green & yellow cable



Fixing details:

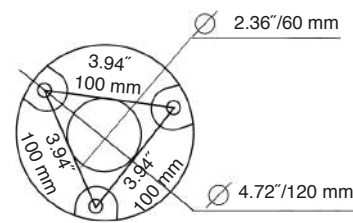

Accessories

Our lights are adaptable to any surroundings. They can grow taller as your garden grows

LD-AX80

Mounting Base

Surface mounting base for spotlights, extension stems and spreadlights



Material: die-cast brass

Finish: old bronze

Diameter: 2.87"/73mm

Installation: any flat surface like wall, deck, concrete anchor, or an optional ground-mount, which can be installed in concrete


Mounting Stem

Extension stem for spotlights and spreadlights. Ideal solution for downlighting small flowers and plants, for uplighting trees from shrubbery or flowerbeds, highlighting architectural elements

Material: die-cast brass

Finish: old bronze

Installation: used with surface mounting base or spike

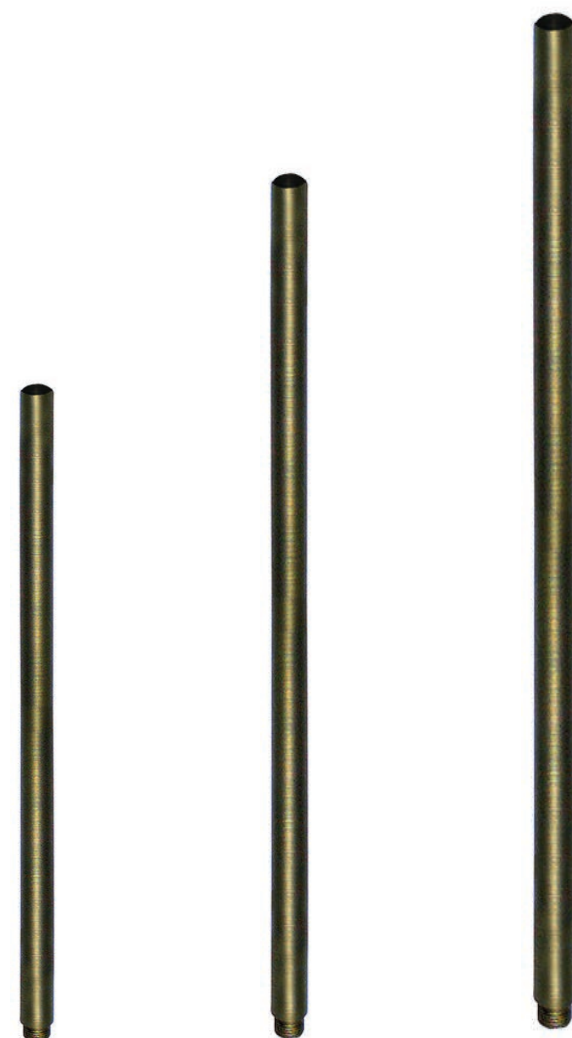

LD-AX40

15"/380mm

LD-AX50

18"/460mm

LD-AX60

24"/610mm





GL-GARDEN LIGHT S.A.

© LD-Lighting, 2019-20

